



Product designation

Product type designation

Number of poles

Operating voltage type

Enclosed switch  
disconnecter  
GAZ  
Nr. 3  
AC

### Contact characteristics

IEC Conventional free air thermal current I <sub>th</sub>	A	25
---	---	----

Rated insulation voltage U <sub>i</sub> IEC/EN	V	1000
--	---	------

Rated impulse withstand voltage U <sub>imp</sub>	kV	8
--	----	---

Operating current I<sub>e</sub>

AC21A

400V	A	25
500V	A	25
690V	A	25

AC22A

400V	A	25
500V	A	25
690V	A	25

AC23A

400V	A	25
500V	A	25
690V	A	25

Power dissipation per pole max	W	0.4
--------------------------------	---	-----

Rated operational power AC23A

400V	kW	11
690V	kW	22

Conditional short-circuit current (rms)	kA	10
---	----	----

Short-circuit protection with fuse	Class/A	gG25
------------------------------------	---------	------

Making capacity AC23A 400V	A	250
----------------------------	---	-----

Breaking capacity AC23A 400V	A	200
------------------------------	---	-----

Mechanical life	cycles	100000
-----------------	--------	--------

Electrical life AC21A	cycles	100000
-----------------------	--------	--------

### Mechanical features

Operating position

normal allowable	Vertical plan Any
---------------------	----------------------


Terminals

type	Pillar
width	5.6
height	6.5
screw	M4
tool	Phillips 2


Tightening torque for terminals

min	Nm	1.8
max	Nm	2

	min	lbin	16
	max	lbin	18
Conductor section			
	IEC min	mm <sup>2</sup>	0.75
	IEC max	mm <sup>2</sup>	16
	AWG/kcmil min		18
	AWG/kcmil max		6
<b>UL technical data</b>			
General purpose current rating		A	25
Operating voltage max		V	600
Horsepower/FLA current single phase motor			
	120V	HP	1.5/20
	240V	HP	3/17
Horsepower/FLA current three phase motor			
	200-208V	HP	7.5/25.3
	240V	HP	7,5/22
	480V	HP	15/21
	600V	HP	20/22
Short circuit rating		kA rms	5
Short circuit rating with fuse		Class/A	RK5/30
<b>Ambient conditions</b>			
Operating temperature			
	min	°C	-25
	max	°C	+55
Storage temperature			
	min	°C	-40
	max	°C	+70
Max altitude		m	3000
<b>Resistance &amp; Protection</b>			
Frontal IP degree			IP65
UL degree of protection			UL/CSA Type 4/4X
IP degree of protection			IP65
Pollution degree			3
<b>Dimensions</b>			

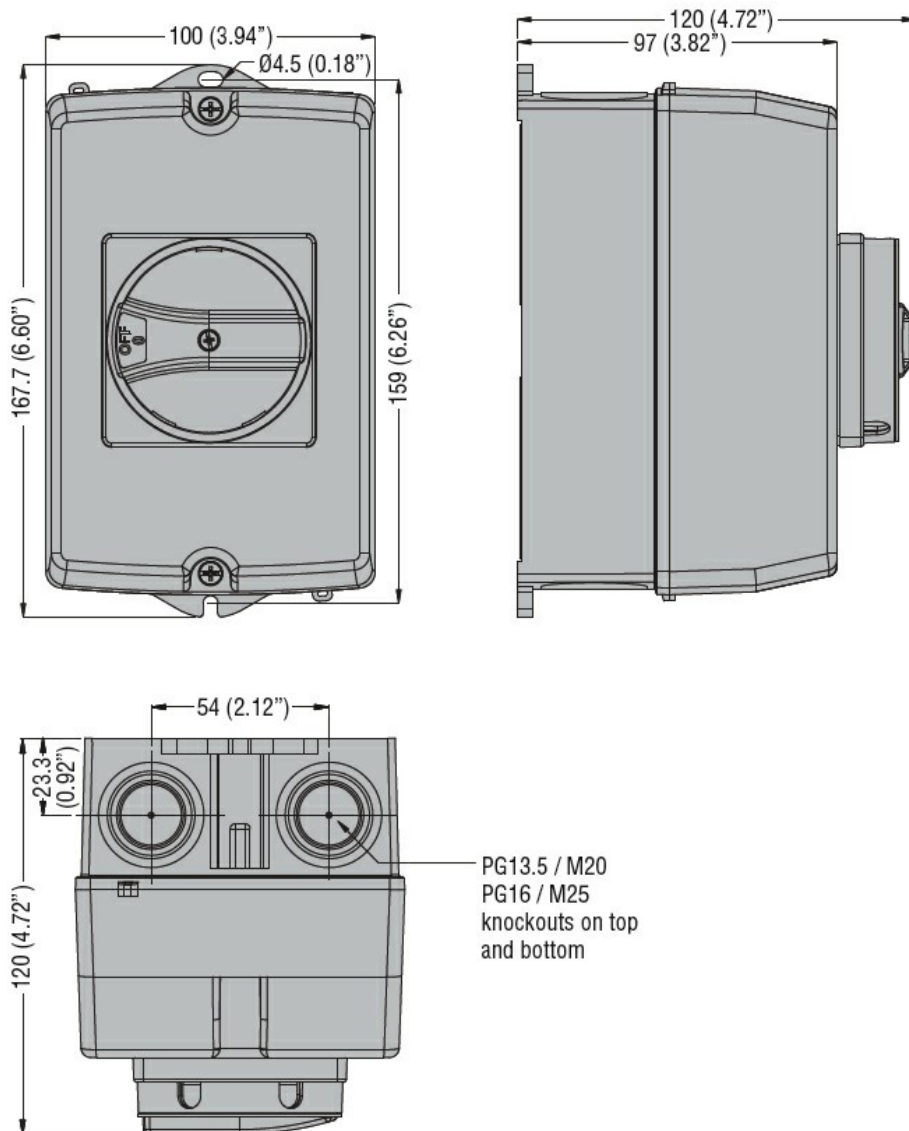

## Wiring diagrams



## Certifications and compliance

### Compliance

IEC/EN 60947-1

IEC/EN 60947-3

### Certifications

cULus

EAC

## ETIM classification

UL/CSA TYPE 4/4X PLASTIC ENCLOSURED SWITCH DISCONNECTOR, THREE-POLE. WITH  
ROTATING RED/YELLOW HANDLE, 25A. ENCLOSURE DIMENSIONS:  
100X168X97MM/3.9X6.6X3.8"

ETIM 8.0

EC000216 -  
Switch  
disconnector