



Product designation			Rotary cam switches
Product type designation			7GN40
General characteristics			
Switching diagram			10 - ON/OFF switch 3 poles
N° of elements			2
Mounting form			O98 - Rear mounting with red/yellow handle padlockable in 0, door coupling and protection covers
Contact characteristics			
Rated insulation voltage Ui			
	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage Uimp			kV 6
Conventional free air thermal current Ith			
	IEC/EN	A	40
	UL/CSA	A	50
Rated operational voltage			V 480
Rated operational impulse voltage			kV 4
Maximum fuse size for short-circuit protection In (gG)			
	10kA	A	40
	15kA	A	40
	25kA	A	40
	50kA	A	40
	63kA	A	40
Rated short time current Icw			
	1s	kA	1000
	60s	A	1000
Conductivity			10/5 mA/V
Operational current Ie IEC/EN			
	AC1/AC21A		
		A	40
	AC15		
	110V	A	25
	220/230V	A	22
	380/400V	A	12
	660/690V	A	2
Rated operational power in AC			
	Three-phase AC-3		
	220/230V	kW	8
	380/440V	kW	15

		500/690V	kW	15
Single-phase AC-3		110V	kW	3
		220/230V	kW	6.5
		380/440V	kW	8
Three-phase AC23A		220/230V	kW	8
		380/440V	kW	18.5
		500/690V	kW	22
Single-phase AC23A		110V	kW	3
		220/230V	kW	6
		380/440V	kW	11
Rated operational current in DC				
DC21A		48V	A	40
		60V	A	40
		110V	A	6
		220V	A	0.9
DC23A (poles in series)		24V	A	40 (1)
		48V	A	40 (2)
		60V	A	40 (3)
		110V	A	20 (3)
		220V	A	12 (4)
DC13		24V	A	40
		48V	A	32
		60V	A	16
		110V	A	3
Power dissipation			W	2.0
Mechanical features				
Terminals screw				M4
Tightening torque for terminals max			Nm	1.2
Conductor size				
AWG - Rigid cable		min	AWG	16
		Max	AWG	8
AWG - Flexible cable		min	AWG	16
		Max	AWG	10
Conductor size (IEC) - Flexible cable		min	mm ²	1.5
		Max	mm ²	6
Conductor size (IEC) - Rigid cable		min	mm ²	1.5
		Max	mm ²	10
Mechanical life			cycles	5x10 ⁶
UL technical data				
Motor power for direct-on-line control				
for three-phase motor				
		120V	HP	5
		240V	HP	10
		480V	HP	20

	600V	HP	20
for single-phase motor			
	120V	HP	2
	240V	HP	5

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature


min	°C	-40
max	°C	+70

Resistance & Protection

Frontal IP degree	IP40
-------------------	------


Terminals IP degree	IP00
---------------------	------

Dimensions

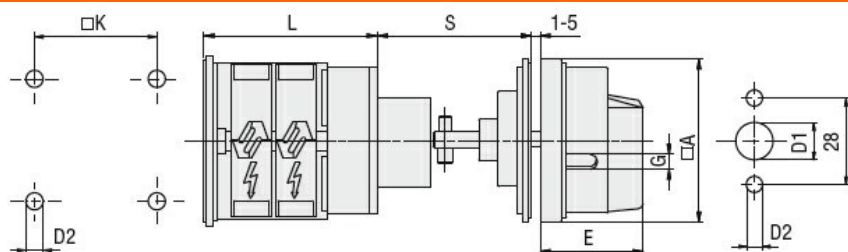

Series	Dimensions							L			
	□A	D1	D2	E	G	□K	S	1	2	3...12	
7GN12	65	12	5	34.2	5	36	45-55	41.1	50.8	60.5	147.8
7GN20	65	12	5	34.2	5	36	45-55	41.1	50.8	60.5	147.8
7GN25	65	14	5	38	6	48	45-55	51.5	66.6	81.7	217.6
7GN40	65	14	5	38	6	48	45-55	51.5	66.6	81.7	217.6
7GN63	65	14	6	38	6	68	45-55	57.3	75.4	93.5	256.4

Wiring diagrams

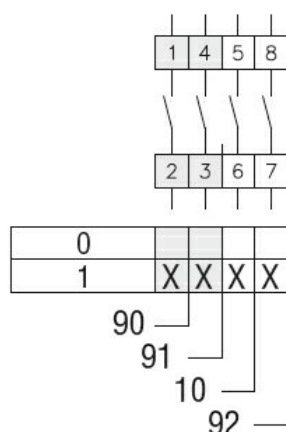

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-3
IEC/EN/BS 60947-5-1
UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification

ETIM 8.0

EC001105 - Off-
load switch