



Product designation			Rotary cam switches
Product type designation			GX32
General characteristics			
Switching diagram			53 - Changeover switch 3 poles - 2 speed motor starting with separate windings
N° of elements			3
Mounting form			U - Front mounting with black handle
Contact characteristics			
Rated insulation voltage Ui			
	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage Uimp		kV	6
Conventional free air thermal current Ith			
	IEC/EN	A	32
	UL/CSA	A	32
Rated operational voltage		V	440
Rated operational impulse voltage		kV	4
Maximum fuse size for short-circuit protection In (gG)			
	10kA	A	35
	15kA	A	35
	25kA	A	35
Rated short time current Icw			
	1s	kA	1000
Conductivity			10/5 mA/V
Operational current Ie IEC/EN			
	AC1/AC21A	A	32
	AC15		
	110V	A	25
	220/230V	A	20
	380/400V	A	10
	660/690V	A	2
Rated operational power in AC			
	Three-phase AC-3		
	220/230V	kW	7.5
	380/440V	kW	11
	500/690V	kW	11
	Single-phase AC-3		
	110V	kW	1.8

ROTARY CAM SWITCH GX SERIES, CHANGEOVER SWITCH 3 POLES 32A, FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

		220/230V	kW	3.5
		380/440V	kW	5.5
Three-phase AC23A				
		220/230V	kW	8
		380/440V	kW	15
		500/690V	kW	15
Single-phase AC23A				
		110V	kW	2.2
		220/230V	kW	3.5
		380/440V	kW	6
Rated operational current in DC				
DC21A				
		48V	A	32
		60V	A	32
		110V	A	5
		220V	A	0.8
		440V	A	0.25
DC23A (poles in series)				
		24V	A	32 (1)
		48V	A	32 (2)
		60V	A	32 (3)
		110V	A	15 (3)
		220V	A	12 (4)
DC13				
		24V	A	32
		48V	A	25
		60V	A	14
		110V	A	3
		220V	A	0.5
		440V	A	0.15
Power dissipation			W	1.6
Mechanical features				
Terminals screw			M4	
Tightening torque for terminals max			Nm	1.2
Conductor size				
AWG - Rigid cable				
		min	AWG	16
		Max	AWG	8
AWG - Flexible cable				
		min	AWG	16
		Max	AWG	10
Conductor size (IEC) - Flexible cable				
		min	mm ²	1.5
		Max	mm ²	6
Conductor size (IEC) - Rigid cable				
		min	mm ²	1.5
		Max	mm ²	10
Mechanical life			cycles	1X10 ⁶
UL technical data				
Motor power for direct-on-line control				
for three-phase motor				
		120V	HP	3
		240V	HP	7.5
		480V	HP	15

ROTARY CAM SWITCH GX SERIES, CHANGEOVER SWITCH 3 POLES 32A, FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 65X65MM

	600V	HP	15
for single-phase motor			
	120V	HP	1.5
	240V	HP	3

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature


min	°C	-40
max	°C	+70

Resistance & Protection

Frontal IP degree IP65


Terminals IP degree IP20

Dimensions

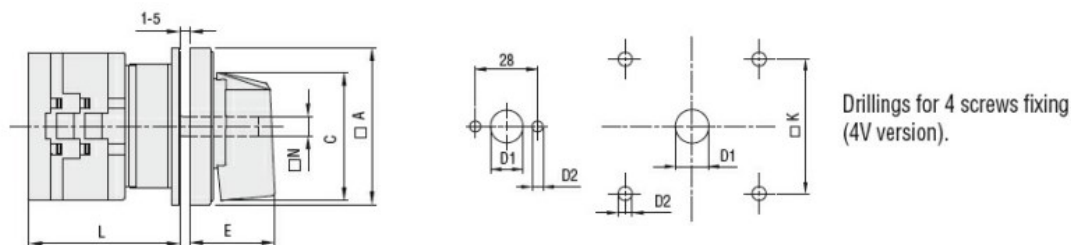

Series	Dimensions							L Number of elements											
	□A	C	ØD1	ØD2	E	□K	□N	1	2	3	4	5	6	7	8	9	10	11	12
GX16	48	39.5	12	5	26.5	36	6	43	51.5	60	68.5	77	85.5	94	102.5	111	119.5	128	136.5
GX20	48	39.5	12	5	26.5	36	6	43	51.5	60	68.5	77	85.5	94	102.5	111	119.5	128	136.5
GX32	65	53	14	5	34.5	48	7	51	63	75	85	99	111	123	135	147	159	171	183
GX40	65	53	14	5	34.5	48	7	51	63	75	85	99	111	123	135	147	159	171	183

Wiring diagrams

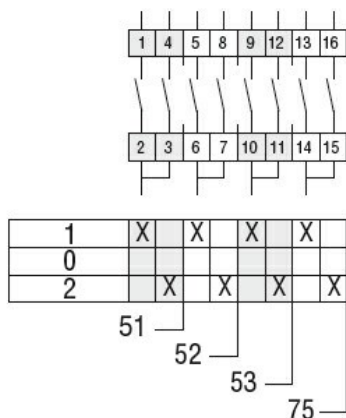

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

UL60947-4-1

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001105 - Off-
load switch