



Product designation

Pushbutton  
actuator, spring  
return  
LPCB20

Product type designation

#### General characteristics

|                          |                         |
|--------------------------|-------------------------|
| Colour                   | Yellow                  |
| Type of positions        | Extended<br>pushbutton  |
| Material                 | Polyamide               |
| IEC degree of protection | IP66, IP67 and<br>IP69K |

#### Mechanical features

|                                           |        |                             |
|-------------------------------------------|--------|-----------------------------|
| Operating force                           | kg-lb  | <0.5Kg / 1.1lb              |
| Mechanical life - spring return actuators | cycles | 5000000                     |
| Fixing                                    |        | Without mounting<br>adapter |
| Mounting adapter                          |        | LPXAU120                    |
| Weight                                    | g      | 27                          |

#### UL technical data

|                         |                                 |
|-------------------------|---------------------------------|
| UL degree of protection | Type1, 2, 3R, 4,<br>4X, 12, 12K |
|-------------------------|---------------------------------|

#### Ambient conditions

Temperature


Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +70 |

Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +85 |

#### Dimensions

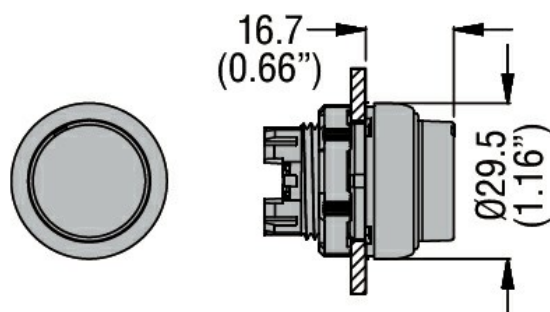

#### Certifications and compliance

Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1

---

UL508

---

Certificates

CCC

cULus

EAC

RINA

ETIM classification

ETIM 8.0

EC000221 -  
Front element for  
push button