



Double-touch  
actuators, spring  
return white  
indicator - Two  
flush pushbuttons  
LPCBL71

## Product designation

## Product type designation

### General characteristics

|                          |                                               |
|--------------------------|-----------------------------------------------|
| Colour                   | Green/Red                                     |
| Type of positions        | Double-touch<br>with two flush<br>pushbuttons |
| Material                 | Polyamide                                     |
| IEC degree of protection | IP66, IP67 and<br>IP69K                       |

### Mechanical features

|                  |        |                |
|------------------|--------|----------------|
| Operating force  | kg-lb  | <0.5Kg / 1.1lb |
| Mechanical life  | cycles | 1000000        |
| Mounting adapter |        | LPXAU120       |
| Weight           | g      | 30             |

### UL technical data

|                         |                                 |
|-------------------------|---------------------------------|
| UL degree of protection | Type1, 2, 3R, 4,<br>4X, 12, 12K |
|-------------------------|---------------------------------|

### Ambient conditions

#### Temperature


##### Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +70 |

##### Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +85 |

### Dimensions

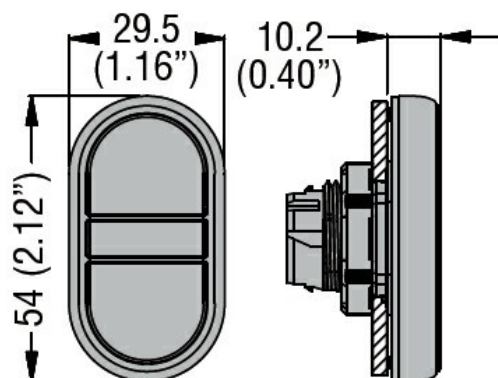

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14

DOUBLE-TOUCH ACTUATOR, SPRING RETURN, WHITE INDICATOR Ø22MM PLATINUM  
SERIES CHROMED PLASTIC, 2 FLUSH PUSHBUTTONS. BOTH SPRING RETURN, GREEN -  
RED/START - STOP

IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1  
UL508

Certificates

CCC  
cULus  
EAC  
RINA

ETIM classification

ETIM 8.0

EC000221 -  
Front element for  
push button