




|                                       |  |        |                                                                        |        |
|---------------------------------------|--|--------|------------------------------------------------------------------------|--------|
| Product designation                   |  |        | Illuminated push-<br>push button<br>actuators -<br>Extended<br>LPCQL20 |        |
| Product type designation              |  |        | LPCQL20                                                                |        |
| General characteristics               |  |        |                                                                        |        |
| Colour                                |  |        | Yellow                                                                 |        |
| Type of positions                     |  |        | Extended<br>pushbutton. Push<br>on-push off                            |        |
| Material                              |  |        | Polyamide                                                              |        |
| IEC degree of protection              |  |        | IP66, IP67 and<br>IP69K                                                |        |
| Mechanical features                   |  |        |                                                                        |        |
| Operating force                       |  | kg-lb  | <0.5Kg / 1.1lb                                                         |        |
| Mechanical life - Push-Push actuators |  | cycles | 500000                                                                 |        |
| Mounting adapter                      |  |        | LPXAU120                                                               |        |
| Weight                                |  | g      | 27                                                                     |        |
| UL technical data                     |  |        |                                                                        |        |
| UL degree of protection               |  |        | Type1, 2, 3R, 4,<br>4X, 12, 12K                                        |        |
| Ambient conditions                    |  |        |                                                                        |        |
| Temperature                           |  |        |                                                                        |        |
| Operating temperature                 |  |        |                                                                        |        |
|                                       |  |        | min                                                                    | °C -25 |
|                                       |  |        | max                                                                    | °C +70 |
| Storage temperature                   |  |        |                                                                        |        |
|                                       |  |        | min                                                                    | °C -40 |
|                                       |  |        | max                                                                    | °C +85 |

## Dimensions

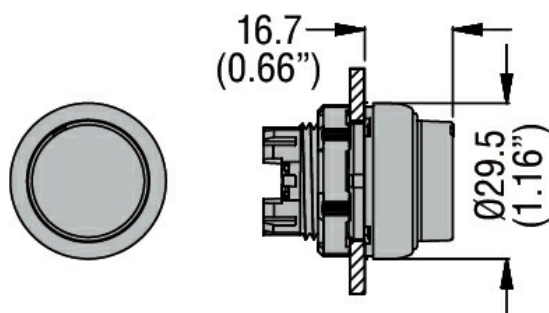

## Certifications and compliance

### Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1

Certificates

UL508

CCC

cULus

EAC

RINA

ETIM classification

ETIM 8.0

EC000221 -  
Front element for  
push button