



Illuminated push-  
push button  
actuators - Flush  
LPFQL10

## Product designation

## Product type designation

### General characteristics

|                          |                                                                          |
|--------------------------|--------------------------------------------------------------------------|
| Colour                   | Blue                                                                     |
| Type of positions        | Flush pushbutton                                                         |
| Material                 | Aluminium and zinc alloy for the metal part, polyamide for plastic parts |
| IEC degree of protection | IP66, IP67 and IP69K                                                     |

### Mechanical features

|                                       |                          |        |
|---------------------------------------|--------------------------|--------|
| Mechanical life - Push-Push actuators | cycles                   | 500000 |
| Fixing                                | Without mounting adapter |        |
| Mounting adapter                      | LPXAU120M                |        |

### UL technical data

|                         |                              |
|-------------------------|------------------------------|
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |
|-------------------------|------------------------------|

### Ambient conditions

#### Temperature


#### Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +70 |

#### Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +85 |

### Dimensions

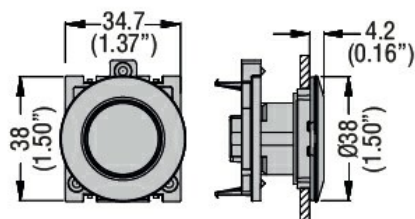

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1  
UL508

#### Certificates

cULus

ETIM classification

ETIM 8.0

EC000221 -  
Front element for  
push button