




Product designation			Mechanical reset buttons, complete unit, spring return	
Product type designation			LPSR20	
General characteristics				
Colour			Red	
Type of positions			Mechanical reset button	
Material			Aluminium and zinc alloy for metal parts and polyamide for plastic parts	
IEC degree of protection			IP66, IP67 and IP69K	
Mechanical features				
Mechanical life		cycles	5000000	
Fixing			Without mounting adapter	
Mounting adapter			LPXAU120M	
UL technical data				
UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K	
Ambient conditions				
Temperature				
Operating temperature		min	°C	-25
		max	°C	+70
Storage temperature		min	°C	-40
		max	°C	+85

Dimensions

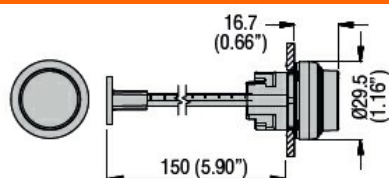

Extended

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC000029 -
Push-switch
button