



Product designation				Switching power supplies
Product type designation				PSL3
Input characteristics				
Input type				Three-phase
Rated supply voltage AC			VAC	Multivoltage 400...500
Operating range				
AC	min	VAC	340	
	Max	VAC	575	
DC	min	VDC	480	
	Max	VDC	820	
Rated frequency			Hz	50/60
Operational frequency				
	min	Hz	47	
	max	Hz	63	
Current consumption Max			mA	2400
PFC				0.8
Insulation voltage Input/Output				
	AC	VAC	3000	
	DC	VAC	4242	
Internal fuse (250VAC)				T5A 500VAC
Output characteristics				
Rated output voltage DC			VDC	24
Voltage trimming (potentiometer) DC				
	min	VDC	22.5	
	Max	VDC	28.5	
Rated output current			A	40
Rated output power			W	960
Temperature coefficient			%/°C	±0.03
Line adjustment			%	±1
Load adjustment			%	±1
Efficiency			%	92
Overload protection				125...145%
Short-circuit protection				Hiccup
Ripple & noise			mV	80
Parallel connection			Nr.	2
Indications				
LED indicator for power on				Yes
LED indicator for low voltage				Yes
Power Rdy (Ready - minimum limit)				Yes
Connections				
Terminals type				Screw

Ambient conditions

Temperature

Operating temperature

min	°C	-40
max	°C	+71

Storage temperature

min	°C	-40
max	°C	+85

Derating

%/°C	3.5%/°C above 60°C
------	--------------------

Housing

Material

Metal

IEC degree of protection

IP20

Dimensions (W x H x D)

mm	275.8 x 125.9 x 120.3
----	-----------------------

Weight


g	3672
---	------

Installations

Mounting


On 35mm DIN rail

Dimensions

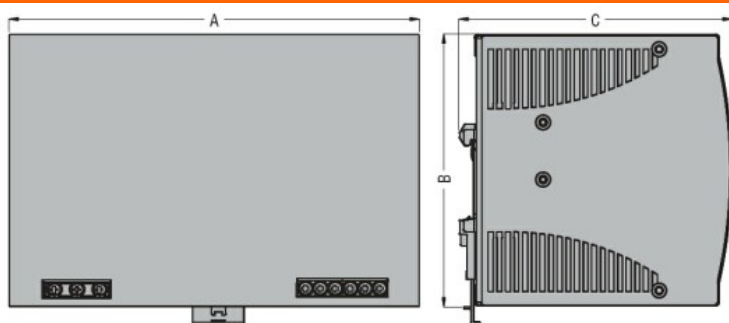

TYPE	A	B	C
PSL1 120...	64 (2.52")	124.5 (4.90")	123.6 (4.87")
PSL1 240...	83.5 (3.29")	124.5 (4.90")	123.6 (4.87")
PSL1 300...	83.5 (3.29")	124.5 (4.90")	123.6 (4.87")
PSL1 480...	175.5 (6.91")	124.5 (4.90")	123.6 (4.87")
PSL3 120 24	74.3 (2.92")	124 (4.88")	118.8 (4.68")
PSL3 240...	89 (3.50")	124 (4.88")	118.8 (4.68")
PSL3 480...	150 (5.90")	124 (4.88")	118.8 (4.68")
PSL3 960...	275.8 (10.86")	125.9 (4.96")	120.3 (4.74")

Wiring diagrams

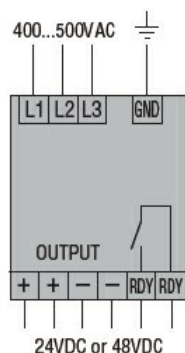

Certifications and compliance

Compliance

CSA C22.2 n°14

IEC/EN/BS 61000-6-2

IEC/EN/BS 61000-6-3

IEC/EN/BS 62368-1

UL 508

Certificates

cULus

EAC

RCM

ETIM classification

ETIM 8.0

EC002540 - DC-
power supply