


KTH label sleeve (halogen-free)

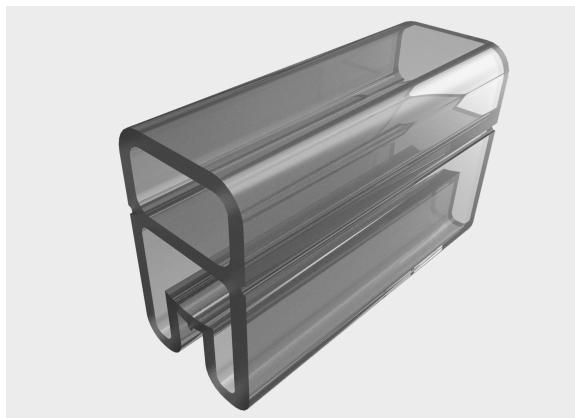


Product information

High-quality, fully transparent, halogen-free label sleeves for labeling wires, cables and conduits. KTH label sleeves hold the type KS labels.

Wire cross section from 0.22 – 35 mm²

- Available in various lengths

Information, conformities and approvals

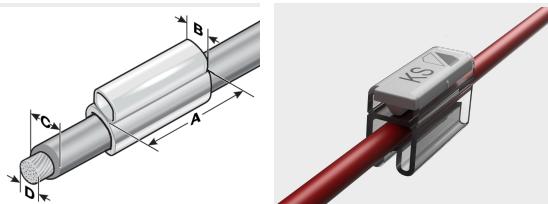

Article	Order No.	Area of application from - to Ø mm (C)	Wire cross section* from - to mm ² (D)	Recommended Label	PU pcs.
---------	-----------	---	--	-------------------	---------

12 mm sleeve length (A), single line marking

KTH 0/12	86221210	1.3 - 2	0.5	KS 4/12 x	2000
KTH 1/12	86221212	1.8 - 2.3	0.5	KS 4/12 x	2000
KTH 2/12	86221214	2.5 - 3.3	0.75 - 2.5	KS 4/12 x	2000
KTH 3/12	86221216	3.5 - 6	2.5 - 6	KS 4/12 x	1000
KTH 4/12	86221218	6 - 9	10 - 16	KS 4/12 x	1000

18 mm sleeve length (A), single line marking

KTH 0/18	86221810	1.3 - 2	0.5	KS 4/18 x	2000
KTH 1/18	86221812	1.8 - 2.3	0.5	KS 4/18 x	2000
KTH 2/18	86221814	2.5 - 3.3	0.75 - 2.5	KS 4/18 x	2000
KTH 3/18	86221816	3.5 - 6	2.5 - 6	KS 4/18 x	1000
KTH 4/18	86221818	6 - 9	10 - 16	KS 4/18 x	1000



KTH label sleeve (halogen-free)

Article	Order No.	Area of application from - to Ø mm (C)	Wire cross section* from - to mm ² (D)	Recommended Label	PU pcs.
KTH 5/18	86221820	9 - 14	25 - 35	KS 4/18 x	500
23 mm sleeve length (A), single line marking					
KTH 0/23	86222310	1.3 - 2	0.5	KS 4/23 x	1000
KTH 1/23	86222312	1.8 - 2.3	0.5	KS 4/23 x	2000
KTH 2/23	86222314	2.5 - 3.3	0.75 - 2.5	KS 4/23 x	1000
KTH 3/23	86222316	3.5 - 6	2.5 - 6	KS 4/23 x	1000
KTH 4/23	86222318	6 - 9	10 - 16	KS 4/23 x	1000
30 mm sleeve length (A), single line marking					
KTH 3/30	86222416	3.5 - 6	2.5 - 6	KS 4/30 x	1000
KTH 4/30	86222418	6 - 9	10 - 16	KS 4/30 x	500

Material properties



EVA II

Thermal properties



Temperature / temperature range -40 °C - 60 °C / short term: 65 °C

Fire properties



Fire classification HB

Technical information



Halogen-free

Classification



ETIM 9: EC001530 || eClass 14: 27281102 || UNSPSC: 39131504 ||



KTH label sleeve (halogen-free)

General technical data



Assembly method 10000000000000

Assembly method



Sleeve system

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.