




KMH/Q label holder (halogen-free / high packing density)

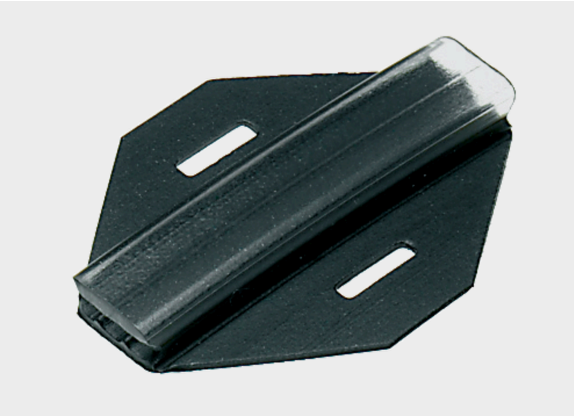


Product information

High-quality, halogen-free, two-part label holders for the highest demands in the labeling of wires, cables and conduits. KMH/Q label holders for BK idents and type KS labels.

- Assembly with cable ties
- Design adapted to label sleeve KTH/Q

Information, conformities and approvals



Article	Order No.	Color	Length mm (A)	Width mm (B)	Diameter min. mm (C)	Cable ties max. width mm	Recommended Label	No. Idents BK23 / BK30	PU pcs.
Labelling lengthwise on the cable/the conduit, single line of print (centred cable ties position)									
KMH/Q 4/23	86223610	Black / Transparent	23	4	5	5	KS 4/x	10 / 7	1000
Labelling lengthwise on the cable/the conduit, single line of print (off centre cable ties position)									
KMH/Q 4/30	86223612	Black / Transparent	30	4	5	5	KS 4/x	13 / 10	1000

Material properties



Thermoplastic polyurethane (TPU) II

Thermal properties



Temperature / temperature range -40 °C – 100 °C / short term: 160 °C

Fire properties



Fire classificationV0



KMH/Q label holder (halogen-free / high packing density)

Technical information



Halogen-free

Approvals and operating permits



EU railway approval

Classification



ETIM 9: EC001530 || eClass 14: 27281102 || UNSPSC: 39131504 ||

General technical data



Assembly method0010000000000

Assembly method



Cable tie system with sleeves