



BS label plate




Product information

High-quality, halogen-free label plate for single-line and multi-line inscription. The BS label plate is mounted directly with a cable tie.

BS 5 and BS 5-2 are suitable for lengthwise mounting. BS 6 can be mounted lengthways and across.

Information, conformities and approvals

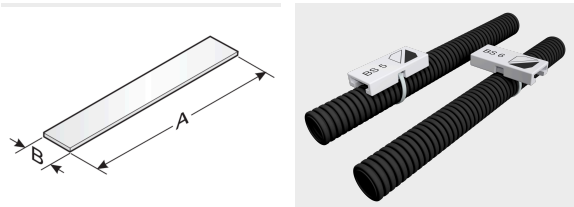

Article	Order No.	Color	RAL equiv.	Label size mm (B x A)	Printable area (mm)	Number of characters / lines	Cable ties max. width mm	Quantity per frame	Software Article	Base plate	PU pcs.
For lengthways mounting (long mat version)											
BS 5L	86281070	White	9016	12 x 27	12 x 27	15 / 3	3	16	80D	GP4L	192
BS 5L	86281071	Yellow	1018	12 x 27	12 x 27	15 / 3	3	16	80E	GP4L	192
For lengthways or crossways mounting (long mat version)											
BS 6L	86281076	White	9016	12 x 27	12 x 27	15 / 3	3	16	81A	GP4L	192
For lengthways mounting											
BS 5-2	86281031	Yellow	1018	12 x 55	12 x 55	30 / 3	3	8	108	none	96

Material properties



Polycarbonate (PC) II



## BS label plate

### Thermal properties



Temperature / temperature range -40 °C – 130 °C

### Fire properties



Fire classification V0

### Technical information



Halogen-free

### Classification



ETIM 9: EC001530 || eClass 14: 27281102 || UNSPSC: 39131504 ||

### General technical data



Assembly method 0001000000000

### Assembly method



Cable tie system with plate

### Labelling technology



Plotter



Laser



Inkjet