





DM Rectangular with radius, 1x hole

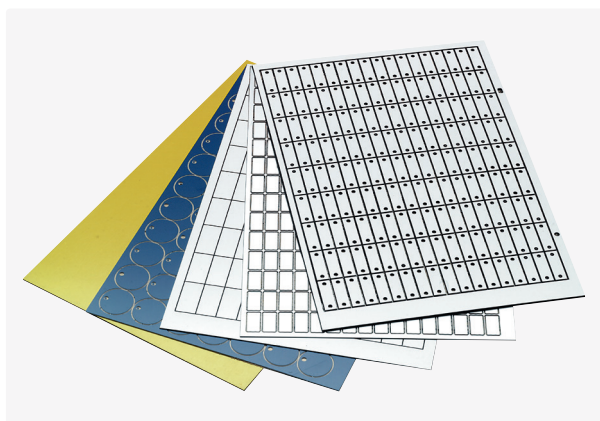

Product information

- Duomatt is a double-layer material with an UV resistant colored outer layer for marking with a Murrplastik engraving or plotter system.
- Available in various colour combinations
- Three different carrier materials available
- Different geometries and holes
- UV resistant outer layer
- Material thickness 0.8 mm or 1.5 mm


Information, conformities and approvals



Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software A
Corner radius 1 mm; with self-adhesive foil							
DM 10x29 R1 SK, 1x3.0MM ¹⁾	8601110004	White / Black	10 x 29	1x 3.0	1.5	144	I64
DM 26x8 R1 SK, 1x2.5MM ¹⁾	8601410001	White / Black	26 x 8	1x 2.5	1.5	242	M26
Corner radius 2 mm; with adhesive foil							
DM 12x60 R2 HF, 1x3.2MM ¹⁾	8601116002	White / Black	12 x 60	1x 3.2	1.5	63	6V
DM 25x15 R2 HF, 1x3.0MM ¹⁾	8601116003	Black / White	25 x 15	1x 3.0	0.8	110	A3
DM 25x15 R2 HF, 1x3.0MM ¹⁾	8601116000	White / Black	25 x 15	1x 3.0	0.8	110	810
DM 25x15 R2 HF, 1x3.0MM ¹⁾	8601116006	White / Black	25 x 15	1x 3.0	1.5	110	I79
DM 25x60 R2 HF, 1x5.0MM ¹⁾	8601416001	White / Red	25 x 60	1x 5.0	1.5	33	J94
DM 61,5x46,4 R2 HF, 1x30.6MM ¹⁾	8601116004	Silver / Black	61.5 x 46.4	1x 30.6	1.5	16	D85
Corner radius 2 mm; with self-adhesive foil							
DM 30x50 R2 SK, 1x22.5MM ¹⁾	8601110003	Silver / Black	30 x 50	1x 22.5	0.8	27	156
DM 45.8x45.8 R2 SK, 1x30 mm ¹⁾	8601110001	Siemens silver / Black	45.8 x 45.8	1x 30.0	0.8	18	402




DM Rectangular with radius, 1x hole





DM Rectangular with radius, 1x hole



Engraving material Dimension table

Article	Order No.	Drill hole position X1 mm	Drill hole position Y1 mm
Corner radius 1 mm; with self-adhesive foil			
DM 10x29 R1 SK, 1x3.0MM ¹⁾	8601110004	5	25
DM 26x8 R1 SK, 1x2.5MM ¹⁾	8601410001	4	4
Corner radius 2 mm; with adhesive foil			
DM 12x60 R2 HF, 1x3.2MM ¹⁾	8601116002	6	5
DM 25x15 R2 HF, 1x3.0MM ¹⁾	8601116003	12.5	12
DM 25x15 R2 HF, 1x3.0MM ¹⁾	8601116000	12.5	12
DM 25x15 R2 HF, 1x3.0MM ¹⁾	8601116006	12.5	12
DM 25x60 R2 HF, 1x5.0MM ¹⁾	8601416001	12.5	30
DM 61,5x46,4 R2 HF, 1x30.6MM ¹⁾	8601116004	41.3	23.2
Corner radius 2 mm; with self-adhesive foil			
DM 30x50 R2 SK, 1x22.5MM ¹⁾	8601110003	15	15
DM 45.8x45.8 R2 SK, 1x30 mm ¹⁾	8601110001	0	0
DM 61.5x61.5 R2 SK, 1x30.0MM ¹⁾	8601110002	0	0
DM 27x12.5 R2 SK, 1x3.2MM ¹⁾	8601110000	3.5	6.25
Corner radius 1 mm; with adhesive foil			
DM 30x80 R1 HF, 1x4.0MM ¹⁾	8601116001	15	7

¹⁾ Other sizes available on request



DM Rectangular with radius, 1x hole

Adhesive properties



467, 5016 SK adhesive film with adhesive, SKS adhesive film with foam adhesive

Thermal properties



Temperature / temperature range -30 °C – 80 °C

General technical data



Single-line and multi-line labelling

Assembly method



Adhesive system



Screw system

Labelling technology



Plotter



Engraving