





DM Circular blank

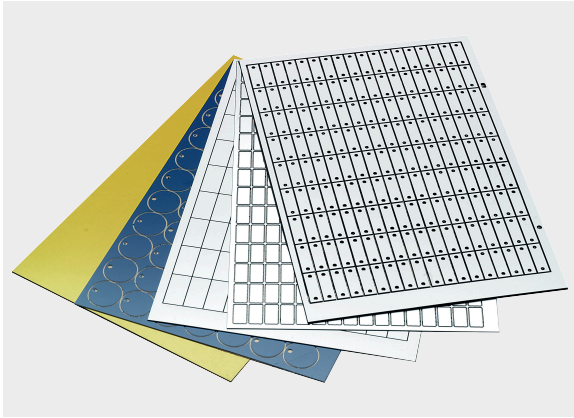

Product information

- Duomatt is a double-layer material with an UV resistant colored outer layer for marking with a Murrplastik engraving or plotter system.
- Available in various color combinations
- Three different carrier materials available
- Different geometries and holes
- UV resistant outer layer
- Material thickness 0.8 mm or 1.5 mm
- Other sizes available on request

Information, conformities and approvals



Article	Order No.	Color	Diameter mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
Round (circular blanks); with self-adhesive foil							
DM D=100 SK 1)	8601300008	Red / White	100	0.8	2	848	2
DM D=21.5 SK 1)	8601300010	Silver / Black	21.5	0.8	96	66	96
DM D=25 SK 1)	8601300003	Yellow / Red	25	0.8	77	553	77
DM D=25 SK 1)	8601300005	Yellow / Black	25	0.8	77	555	77
DM D=25 SK 1)	8601300001	Red / White	25	0.8	77	551	77
DM D=25 SK 1)	8601300004	Siemens silver / Black	25	0.8	77	554	77
DM D=25 SK 1)	8601300002	White / Red	25	0.8	77	552	77
DM D=30 SK 1)	8601300006	Black / White	30	0.8	54	844	54
DM D=30 SK 1)	8601300000	White / Red	30	0.8	54	520	54
DM D=40 SK 1)	8601300009	Red / White	40	0.8	28	47B	28
DM D=48 SK 1)	8601300007	Red / White	48	0.8	15	847	15

Round (circular blanks); with adhesive foil							
--	--	--	--	--	--	--	--



DM Circular blank

Article	Order No.	Color	Diameter mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
DM D=12 HF 1)	8601306001	White / Black	12	1.5	308	796	308
DM D=20 HF 1)	8601306002	White / Black	20	1.5	104	795	104
DM D=20 SK 1)	8601300011	Yellow / Black	20	0.8	126	Z13	126
DM D=20 SK 1)	8601300012	Green / White	20	0.8	126	Z14	126
DM° D=19 HF 1)	8601306003	White / Black	19	1.5	135	L63	135
Round (circular blanks); with high-strength adhesive foam foil							
DM D=25 SKS 2)	8601302001	Siemens silver / Black	25	0.8	77	D86	77
DM D=25 SKS 2)	8601302004	Silver / Black	25	1.5	77	Z85	77
DM D=40 SKS 2)	8601302003	Gray / White	40	1.5	28	J85	28
DM D=40 SKS 2)	8601302002	Red / White	40	1.5	28	H87	28
DM D=40 SKS 2)	8601302005	White / Red	40	1.5	28	A16	28
DM D=60 SKS 2)	8601302006	White / Red	60	1.5	12	A90	12

1) Other sizes available on request

2) Due to the adhesive properties of the SKS film, it can happen that the manufactured signs stick together again after processing and have to be trimmed.

Adhesive properties



4675016SK adhesive film with adhesiveSKS adhesive film with foam adhesive

Thermal properties



Temperature / temperature range -30 °C – 80 °C

Classification



ETIM 9: EC001288 || eClass 14: 27144009 || UNSPSC: 39131504 ||

General technical data



Assembly method00000001Label glued into place 00000



DM Circular blank

Assembly method



Adhesive system

Labelling technology



Plotter



Engraving
