




Heat protection



Product information

Simple heat protection for corrugated conduits. Protects the cable package from radiant heat and welding splatters. The heat protection can also be easily retrofitted. Durable pressure heads securely close the longitudinal slit. The standard length of 150 cm can be shortened individually if required.

Information, conformities and approvals

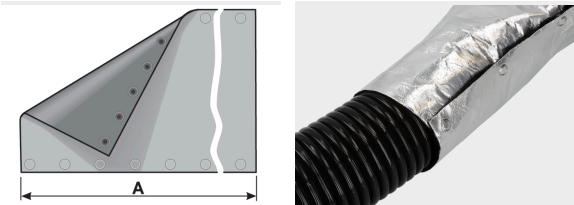

Article	Order No.	Color	A mm	Suitable for Murrflex	PU pcs.
R-HPJ 50-1500	83692120	Silver / Black	1500	M50/P48	1
R-HPJ 70-1500	83692130	Silver / Black	1500	NW70	1

Thermal properties



Temperature / temperature range -55 °C – 250 °C

Fire properties



Fire classificationnon-flammable

Approvals and operating permits



ROBI approval

Classification



ETIM 9: EC010746 || eClass 14: 27439090 || UNSPSC: 39121620 ||



Heat protection
