




Ball joint KEG/ZL - Hose ring SRF/ZL



Product information

The KEG-ZL and SRF/ZL is used wherever cords or cables exit from the cable protection conduit with strain relief. The separable ball end joint type KEG/ZL and the separable hose ring type SRF/ZL with integrated strain relief are simply and quickly inserted into the SH system holders and thus connect the Murrflex cable protection conduits to the robot. The cords, conduits and cables are connected to the integrated strain relief with cable ties.

Information, conformities and approvals

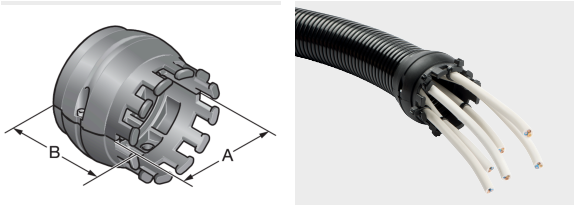

Article	Order No.	Color	A mm	B mm	Suitable for System holder	Version	Suitable for Murrflex	PU pcs.
End ball joint with integrated strain relief								
KEG/ZL-M25	83692258	Black	42.5	38.5	SH-P/M25-M32	Split	M25/P21	1
KEG/ZL-M32	83692260	Black	42.5	38.5	SH-P/M25-M32	Split	M32/P29	1
KEG/ZL-M40	83692262	Black	69	56.5	SH-P/M40-M50	Split	M40/P36	1
KEG/ZL-M50	83692264	Black	69	56.5	SH-P/M40-M50	Split	M50/P48	1
Hose ring (fixed) with integrated strain relief								
SRF/ZL-70	83692266	Black	89.5	58.5	SH 56/70	Split	70 Jumbo	1
SRF/ZL-95	83692270	Black	119	74.5	SH 80/95	Split	95 Jumbo	1

Material properties



mod. polyamide II



Ball joint KEG/ZL - Hose ring SRF/ZL

Thermal properties



Temperature / temperature range -40 °C – 110 °C / short term: 140 °C

Fire properties



Fire classification acc. to UL94: V0

Technical information



Halogen-free

Conformity



RoHS (EC Directive 2011/65/EU)

Approvals and operating permits



ROBI approval

Classification



ETIM 9: EC010745 || eClass 14: 27439090 || UNSPSC: 40141764 ||

General information



Made in Germany