



Type EW




Product information

The EW cable protection conduits are made of specially modified polyethylene. The material is halogen, phosphor and cadmium-free. The EW cable protection conduits are characterised by excellent flexibility and good flexural fatigue strength.

Applications:

- Light mechanical loads
- Plant engineering
- Mechanical engineering
- Control cabinet construction

Information, conformities and approvals

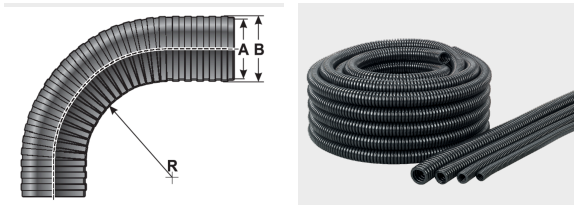

Article	Order No.	Color	metric	PG	NW	A Ø mm	B Ø mm	Stat./Dyn. Radius mm	Weight kg/100m	PU m
EW M10/P07	83101050	Black	M10	PG07	NW 7	8.3	11.3	30/-	2.2	50
EW M12/P9	83101052	Black	M12	PG09	NW 10	9.8	12.8	40/-	2.4	50
EW M16/P11	83101054	Black	M16	PG11	NW 12	11.6	15.7	45/-	3.4	50
EW M20/P16	83101056	Black	M20	PG16	NW 17	15.9	20.7	55/-	5.4	50
EW M20/P16S	83101058	Black	M20	PG16	NW 17	16.8	21	60/-	5.6	50
EW M25/P21	83101060	Black	M25	PG21	NW 23	22.4	28.3	70/-	8.2	50
EW M32/P29	83101062	Black	M32	PG29	NW 29	28	33.85	80/-	11.0	25
EW M40/P36	83101064	Black	M40	PG36	NW 36	35.5	42	100/-	12.4	25
EW M50/P48	83101066	Black	M50	PG48	NW 48	48.2	53.9	115/-	19.5	25
EW 70 Jumbo	83101070	Black			NW 70	66.8	79.2	180/-	48.0	25
EW 95 Jumbo	83101074	Black			NW 95	90.4	105.5	200/-	75.0	10
EW M10/P7	83101010	Gray	M10	PG07	NW 7	8.3	11.3	30/-	2.2	50
EW M12/P9	83101012	Gray	M12	PG09	NW 10	9.8	12.8	40/-	2.4	50



Type EW

Article	Order No.	Color	metric	PG	NW	A Ø mm	B Ø mm	Stat./Dyn. Radius mm	Weight kg/100m	PU m
EW M16/P11	83101014	Gray	M16	PG11	NW 12	11.6	15.7	45/-	3.4	50
EW M20/P16	83101016	Gray	M20	PG16	NW 17	15.9	20.7	55/-	5.4	50
EW M20/P16S	83101020	Gray	M20	PG16	NW 17	16.8	21	60/-	5.6	50
EW M25/P21	83101022	Gray	M25	PG21	NW 23	22.4	28.3	70/-	8.2	50
EW M25/P21S	83103022	Gray	M25	PG21	NW 23	22.6	28	70/-	8.2	50
EW M32/P29	83101026	Gray	M32	PG29	NW 29	28	33.85	80/-	11.0	25
EW M40/P36	83101030	Gray	M40	PG36	NW 36	35.5	42	100/-	12.4	25
EW M50/P48	83101032	Gray	M50	PG48	NW 48	48.2	53.9	115/-	19.5	25
EW 70 Jumbo	83101036	Gray			NW 70	66.8	79.2	180/-	48.0	25
EW 95 Jumbo	83101040	Gray			NW 95	90.4	105.5	200/-	75.0	10

Material properties



mod. polyethylene II



High angle consistency>100 N<160 N50 x 50 mm100 x 100 mm According to IEC EN 61386According to IEC EN 61386 M25/P21M25/P21 Testing at 23 °CTesting at 23 °C



Flexural fatigue strength>4000 ~According to IEC EN 61386 M25/P21 Testing at -45 °C



System tear-out strength≥120 NAccording to IEC EN 61386 M25/P21 Testing at 23 °CFitting M-PRO

Thermal properties



Temperature / temperature range -20 °C – 70 °C / short term: 90 °C

Fire properties



Fire classificationacc. to UL94: HB



Type EW

Chemical resistances



Resistant to: Fuels Weak acids Mineral oils Greases

Technical information



Halogen-free

Classification



ETIM 9: EC001175 || eClass 14: 27430305 || UNSPSC: 39131601 ||

General information



Made in Germany