




Typ UH

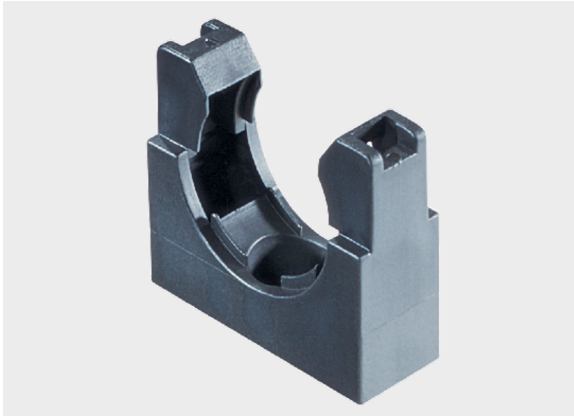



Product information

The UH holder is made of specially modified polyamide. The material is halogen, phosphor and cadmium-free. The holder is used to fix cable protection conduits to equipment and machinery.

The UH holder features the following advantages:

- Quick assembly thanks to single-hole fixing
- Protective conduit is simply snapped in
- Optimum connection of conduit to holder thanks to double webs of holder
- Optional BL bracket for applications with high stresses

Information, conformities and approvals



Article	Order No.	Color	UV	Suitable for Murrflex	G suitable for	A mm	B mm	C mm	PU pcs.
UH 07	83621210	Black	✓	M10/P07	M4	29	23	11	100
UH 09/M4	83621212	Black	✓	M12/P09	M4	30	23	12.5	100
UH 09/M5	83621213	Black	✓	M12/P09	M5	30	23	12.5	100
UH 11/M4	83621214	Black	✓	M16/P11	M4	30	23	12.5	100
UH 11/M5	83621215	Black	✓	M16/P11	M5	30	23	12.5	100
UH 16/M5	83621216	Black	✓	M20/P16(S)	M5	35	30	15	100
UH 16/M6	83621217	Black	✓	M20/P16(S)	M6	35	30	15	100
UH 21	83621218	Black	✓	M25/P21(S)	M6	42	38	16	100
UH 29	83621220	Black	✓	M32/P29(S)	M6	51	43	16	50
UH 36	83621222	Black	✓	M40/P36(S)	M6	61	51	18	50
UH 48	83621224	Black	✓	M50/P48(S)	M6	74	64	19	50
UH 07	83621110	Gray	✗	M10/P07	M4	29	23	11	100
UH 09/M4	83621112	Gray	✗	M12/P09	M4	30	23	12.5	100



Typ UH

Article	Order No.	Color	UV	Suitable for Murrflex	G suitable for	A mm	B mm	C mm	PU pcs.
UH 09/M5	83621113	Gray	✗	M12/P09	M5	30	23	12.5	100
UH 11/M4	83621114	Gray	✗	M16/P11	M4	30	23	12.5	100
UH 11/M5	83621115	Gray	✗	M16/P11	M5	30	23	12.5	100
UH 16/M5	83621116	Gray	✗	M20/P16(S)	M5	35	30	15	100
UH 16/M6	83621117	Gray	✗	M20/P16(S)	M6	35	30	15	100
UH 21	83621118	Gray	✗	M25/P21(S)	M6	42	38	16	100
UH 29	83621120	Gray	✗	M32/P29(S)	M6	51	43	16	50
UH 36	83621122	Gray	✗	M40/P36(S)	M6	61	51	18	50
UH 48	83621124	Gray	✗	M50/P48(S)	M6	74	64	19	50

Material properties



mod. polyamide PA 6 II

Thermal properties



Temperature / temperature range -40 °C – 110 °C / short term: 140 °C

Fire properties



Fire classification acc. to UL94: V0 self-extinguishing



Fire properties as per EN 45545-2: C.I.T. R22 / R23 HL3 : 0,58 NF X 70-100-1/-2 600°C (1112 °F) LOI R22 / R23 HL3 : ≥ 32 % ISO 4589-2Ds (max.) R22 / R23 HL3 : 57 ISO 5659-2 (25 KW/m²)



Fire properties as per NFPA ASTM E 162 ASTM E 1354 ASTM E 662 Boeing BSS 7239 Boeing BSS 7242 Bombardier SMP 800-C

Chemical resistances



Resistant to: Alcohol Greases Fuels Mineral oils



Typ UH

Technical information



Halogen-free



UV-resistant acc. to ISO 4892-2

Conformity



RoHS (EC Directive 2011/65/EU)



ECE 324 R 118

Approvals and operating permits



EU railway approval



cURus approval

Classification



ETIM 9: EC000368 || eClass 14: 27430315 || UNSPSC: 31162814 ||

General information



Made in Germany