



Type KV-ME (multi-insert)



Product information


The KV-ME multi-insert can be used both in WKK cable fittings and in WKM cable fittings.

The KV-ME multi-insert can be used to route several cables through one fitting. The fitted seal insert in the cable fitting is simply swapped for the KV-ME multi-insert during assembly. Please note that the cable diameter may be up to 20% less than the diameter of the hole, but must not undershoot the hole diameter by less than 1 mm.

The KV-ME multi-inserts feature the following advantages:

- Variable
- More cables through one fitting
- High protection class

NOT suitable for the m-seal cable fittings.

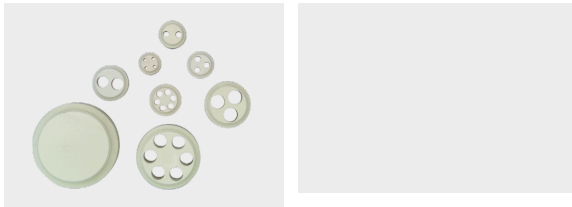

Information, conformities and approvals

RoHS

Article	Order No.	Color	No. Openings	Diameter mm	Suitable for metric	Suitable for PG	Suitable for NPT	PU pcs.
KV-ME M16/ PG09-4x1,4	8358221000	White	4	1,4	M16x1,5	PG 09	3/8"	50
KV-ME M16/PG09-2x3	8358221200	White	2	3	M16x1,5	PG 09	3/8"	50
KV-ME M20/ PG13.5-2x5	8358222000	White	2	5	M20x1,5	PG 13,5	1/2"	50
KV-ME M20/ PG13.5-3x2	8358222200	White	3	2	M20x1,5	PG 13,5	1/2"	50
KV-ME M20/ PG13.5-3x4	8358222400	White	3	4	M20x1,5	PG 13,5	1/2"	100
KV-ME M20/ PG13.5-6x3	8358222600	White	6	3	M20x1,5	PG 13,5	1/2"	50
KV-ME PG11-2x3	8358221400	White	2	3		PG 11		50
KV-ME PG11-2x4	8358221600	White	2	4		PG 11		50
KV-ME PG11-3x3	8358221800	White	3	3		PG 11		50
KV-ME PG16-2x6	8358222800	White	2	6		PG 16		50
KV-ME PG16-3x3 1)	8358223000	White	3	3		PG 16		50
KV-ME PG16-3x4	8358223200	White	3	4		PG 16		50
KV-ME PG16-3x5.6	8358223400	White	3	5.6		PG 16		50



Type KV-ME (multi-insert)

Article	Order No.	Color	No. Openings	Diameter mm	Suitable for metric	Suitable for PG	Suitable for NPT	PU pcs.
KV-ME PG16-4x4	8358223600	White	4	4		PG 16		50
KV-ME PG16-5x4 1)	8358223800	White	5	4		PG 16		50
KV-ME PG16-6x4	8358224000	White	6	4		PG 16		50
KV-ME M25/PG21-2x8	8358224200	White	2	8	M25x1,5	PG 21	3/4"	50
KV-ME M25/PG21-3x7	8358224400	White	3	7	M25x1,5	PG 21	3/4"	50
KV-ME M25/PG21-4x6	8358224600	White	4	6	M25x1,5	PG 21	3/4"	50
KV-ME M32/ PG29-6x6,5	8358224800	White	6	6.5	M32x1,5	PG 29		50
KV-ME M32/PG29-4x9	8358225000	White	4	9	M32x1,5	PG 29		25
KV-ME M40/PG36 blind	8358228400	White			M40x1,5	PG 36	1 1/2"	25

1) No stock goods, delivery time and minimum order quantities upon request

Material properties



Elastomer II

Thermal properties



Temperature / temperature range -40 °C – 100 °C / short term: 120 °C

Protection class



Protection class IP65

Conformity



RoHS (EC Directive 2011/65/EU)

Classification



ETIM 9: EC000879 || eClass 14: 27144425 || UNSPSC: 39121719 ||

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.