



Product designation

Power contactor

Product type designation

B250

Contact characteristics


Number of poles	Nr.	3
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	8
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current I_{th}	A	350
Operational current I_e	AC-1 ($\leq 40^\circ\text{C}$)	A 350
	AC-1 ($\leq 55^\circ\text{C}$)	A 300
	AC-1 ($\leq 70^\circ\text{C}$)	A 250
	AC-3 ($\leq 440\text{V } \leq 55^\circ\text{C}$)	A 265
	AC-4 (400V)	A 115
Rated operational power AC-3 ($T \leq 55^\circ\text{C}$)	400V	kW 140
Rated operational power AC-1 ($T \leq 40^\circ\text{C}$)	230V	kW 124
	400V	kW 214
	500V	kW 282
	690V	kW 380
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series	75V	A 350
	110V	A 160
	220V	A --
	330V	A --
	460V	A --
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series	75V	A 350
	110V	A 300
	220V	A 250
	330V	A --
	460V	A --
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series	75V	A 350
	110V	A 300
	220V	A 300
	330V	A 250
	460V	A --
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series	75V	A 350
	110V	A 300
	220V	A 300

	330V	A	300
	460V	A	250
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 1 poles in series			
	75V	A	280
	110V	A	150
	220V	A	--
	330V	A	--
	460V	A	--
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 2 poles in series			
	75V	A	280
	110V	A	250
	220V	A	200
	330V	A	--
	460V	A	--
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 3 poles in series			
	75V	A	280
	110V	A	280
	220V	A	250
	330V	A	200
	460V	A	--
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 4 poles in series			
	75V	A	280
	110V	A	280
	220V	A	280
	330V	A	200
	460V	A	200
Short-time allowable current for 10s (IEC/EN60947-1)		A	2200
Protection fuse			
	gG (IEC)	A	400
	aM (IEC)	A	250
Making capacity (RMS value)		A	2750
Breaking capacity at voltage			
	440V	A	2500
	500V	A	2250
	690V	A	2200
Resistance per pole (average value)		mΩ	0.2
Power dissipation per pole (average value)			
	Ith	W	24.5
	AC-3	W	12.5
Tightening torque for terminals			
	min	Nm	35
	max	Nm	35
	min	Ibin	25.8
	max	Ibin	25.8
Tightening torque for coil terminal			
	min	Nm	1
	max	Nm	1
	min	Ibin	0.74
	max	Ibin	0.74
Max number of wires simultaneously connectable		Nr.	2
Conductor section			
	AWG/Kcmil		
	max		500 kcmil


Power terminal protection according to IEC/EN 60529			IP00	
Mechanical features				
Operating position		normal allowable	Vertical plan ±30°	
Fixing		Screw		
Weight		g	1028	
Operations				
Mechanical life		cycles	10000000	
Electrical life		cycles	1000000	
Safety related data				
Performance level B10d according to EN/ISO 13489-1				
		rated load mechanical load	cycles	1000000
			cycles	10000000
Mirror contats according to IEC/EN 609474-4-1			Yes	
EMC compatibility			yes	
AC coil operating				
Rated AC voltage at 50/60Hz, 60Hz				
		min	V	110
		max	V	125
AC operating voltage				
of 50/60Hz coil powered at 50Hz				
pick-up		min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	60
of 50/60Hz coil powered at 60Hz				
pick-up		min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	60
of 60Hz coil powered at 60Hz				
pick-up		min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	60
AC average coil consumption at 20°C				
of 50/60Hz coil powered at 50Hz		in-rush	VA	300
		holding	VA	10
of 50/60Hz coil powered at 60Hz		in-rush	VA	300
		holding	VA	10
Dissipation at holding ≤20°C 50Hz			W	10
DC coil operating				
DC rated control voltage				
		min	V	110

		max	V	125
DC operating voltage				
pick-up		min	%Us	80
		max	%Us	110
drop-out				
		min	%Us	20
		max	%Us	60
Average coil consumption ≤20°C				
		in-rush	W	300
		holding	W	10
Max cycles frequency				
Mechanical operation			cycles/h	2400
Operating times				
Average time for Us control				
in AC	Closing NO	min	ms	80
		max	ms	120
	Opening NO	min	ms	30
		max	ms	75
in DC				
	Closing NO	min	ms	80
		max	ms	120
	Opening NO	min	ms	30
		max	ms	75
UL technical data				
Rated operational voltage AC (UL)			V	600
Full-load current (FLA) for three-phase AC motor				
		at 480V	A	240
		at 600V	A	242
Yielded mechanical performance				
for three-phase AC motor				
		200/208V	HP	75
		220/230V	HP	100
		575/600V	HP	250
General USE				
Contactor				
		AC current	A	350
Short-circuit protection fuse, 600V				
Standard fault				
	Short circuit current	kA	18	
		Fuse rating	A	800
		Fuse class	L	
Ambient conditions				
Temperature				
Operating temperature				
		min	°C	-50
		max	°C	70
Storage temperature				
		min	°C	-60

	max	°C	80
Max altitude		m	3000
Resistance & Protection			
Pollution degree			3
Dimensions			

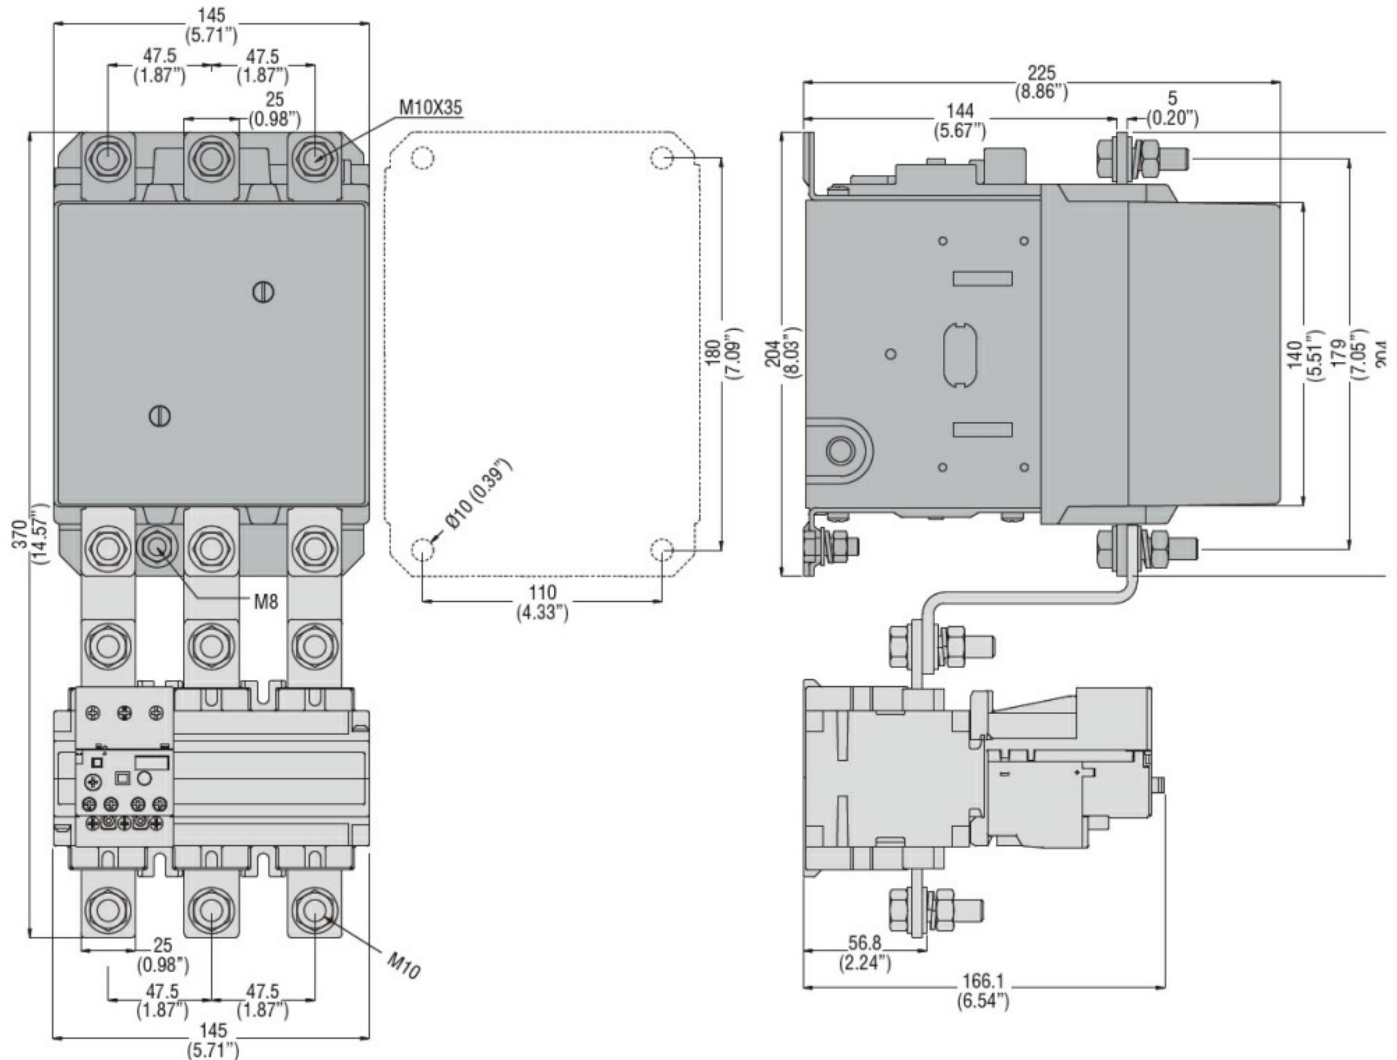

Wiring diagrams

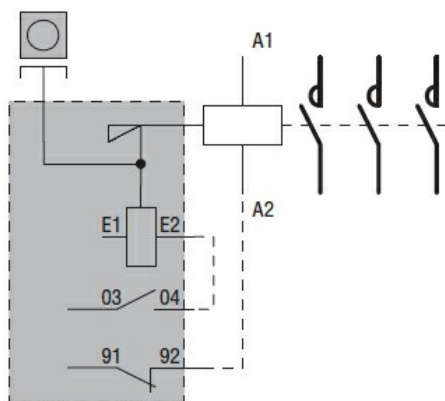

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
 Power contactor,
 AC switching