



Rigid connecting  
kits for star-delta  
starter. For  
BF40...BF94 (L/  
Δ) BF26...BF38  
(λ)  
BFX3332

Product designation

Product type designation


#### Mechanical features

Weight g 200


#### UL technical data

Rated operational voltage AC (UL) V 600

#### Dimensions

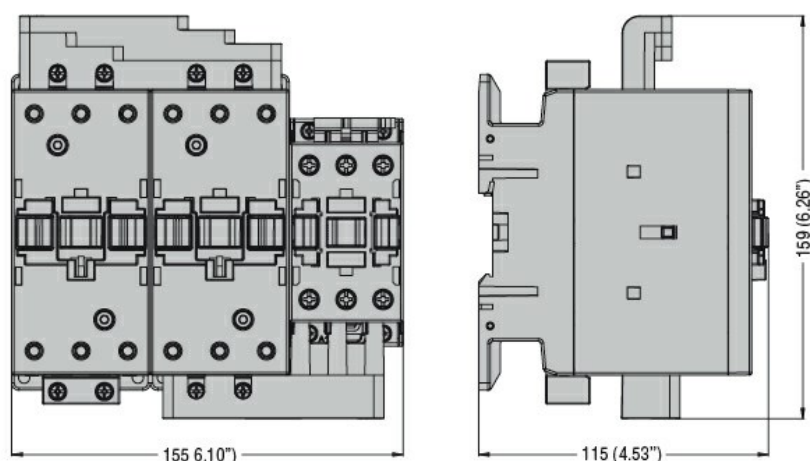

#### Wiring diagrams

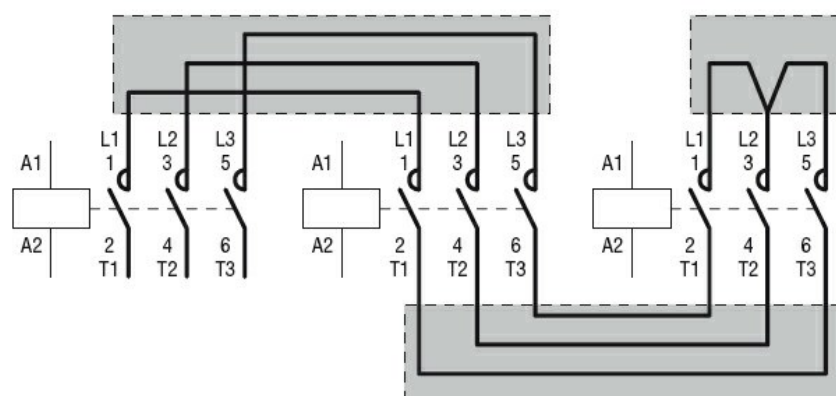

#### Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

IEC/EN 60947-1

UL 60947-1

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC002498 -  
Accessories/spare  
parts for low-  
voltage switch  
technology