



Product designation

Direct-on-line
starter

Product type designation

M2P03210

Electrical features

Maximum operating current ($\leq 440V$)	A	32
---	---	----

Components

Starter enclosure standard supplied	M2PA
-------------------------------------	------

Contactor standard supplied	BF3200A
-----------------------------	---------

Thermal relay to purchase separately	RF38...
--------------------------------------	---------

Auxiliary contact standard supplied	G41810
-------------------------------------	--------

Mechanical features

Weight	g	1162
--------	---	------

Ambient conditions


Operating temperature	min	°C	-25
	max	°C	+60

Storage temperature	min	°C	-40
	max	°C	+70


Resistance & Protection

Frontal IP degree	IP65
-------------------	------

Dimensions

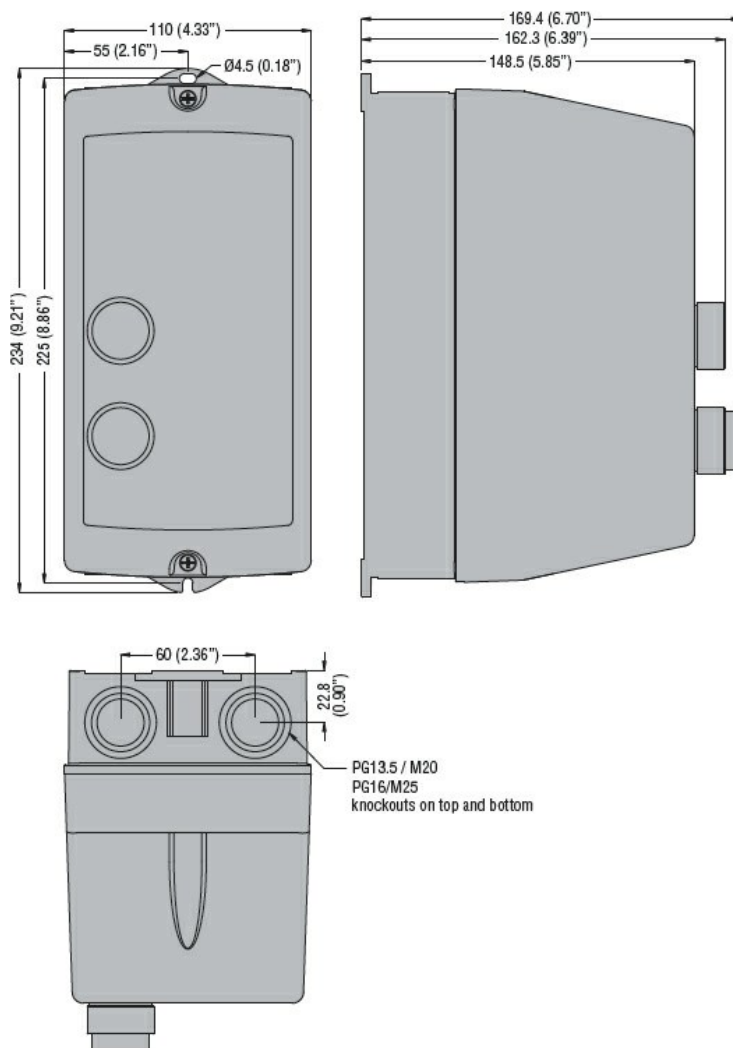

Wiring diagrams

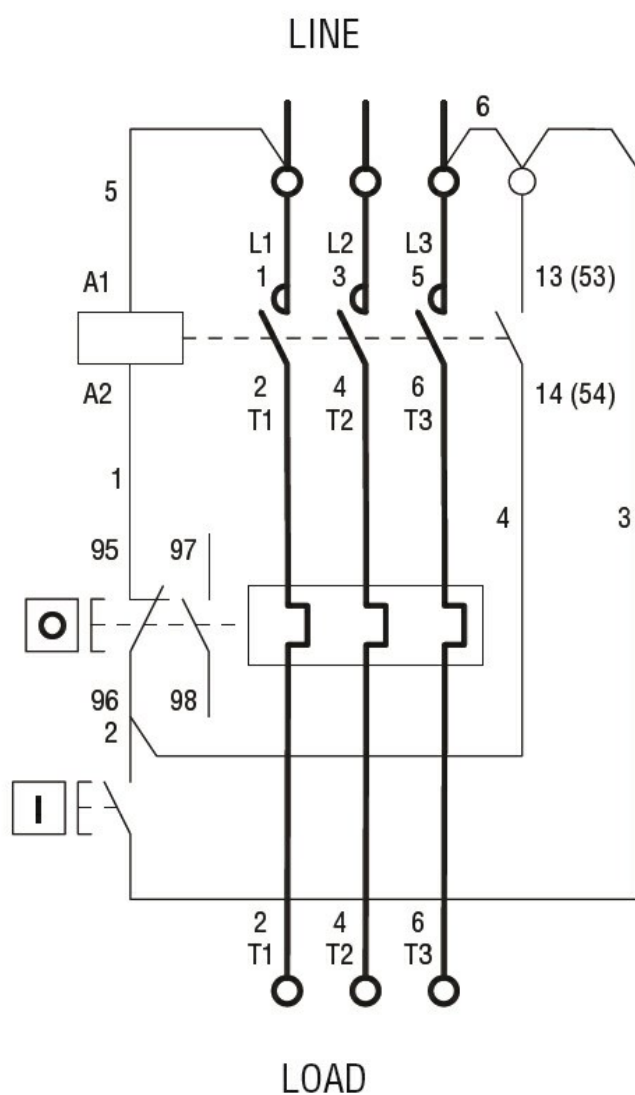

I = Start; O = Stop/Reset

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-4-1
UL508 CSA C22.2 n° 14

Certificates

CSAus
cULus
EAC

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination