



Enclosed star-
delta starters
M3PA70

Product designation

Product type designation

Mechanical features

Weight	g	2240
--------	---	------

Ambient conditions


Operating temperature	min	°C	-25
	max	°C	+60

Storage temperature	min	°C	-40
	max	°C	+70

Resistance & Protection

Frontal IP degree	IP65
-------------------	------

Dimensions

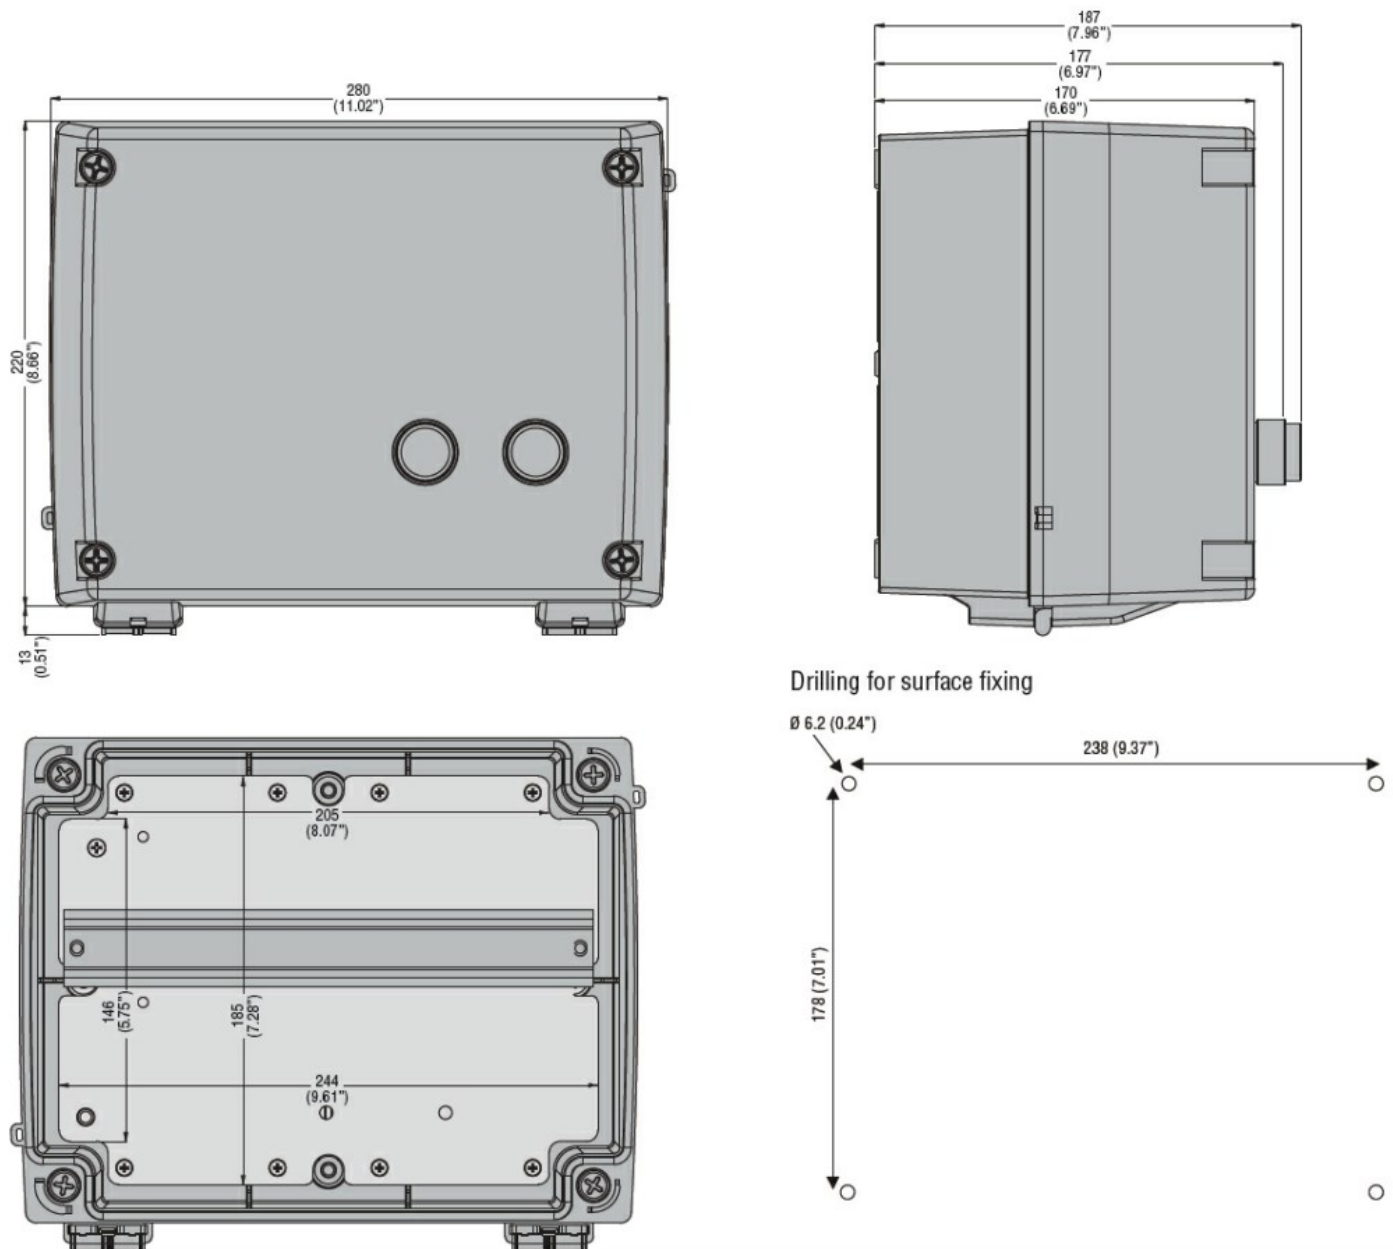

Certifications and compliance

Compliance

CSA C22.2 n° 14

for starters

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508

Certificates

/

ETIM classification

ETIM 8.0

EC000200 -
Enclosure for
control circuit
devices