



Product designation

Enclosed star-
delta starters
M3P02670

Product type designation

Electrical features

Maximum operating current ($\leq 440V$)	A	43
---	---	----

Components

Starter enclosure standard supplied	M3PA70
-------------------------------------	--------

Contactor standard supplied	BF2600A, BF2600A, BF1810A
-----------------------------	---------------------------------

Thermal relay to purchase separately	RF38...
--------------------------------------	---------

Auxiliary contact standard supplied	BFX1020, BFX1011, BFX1011
-------------------------------------	---------------------------------

Contact characteristics

IEC standard motor powers	230V	kW	11
	400V	kW	22
	440V	kW	22
	500V	kW	25

Mechanical features

Weight	g	3650
--------	---	------

Ambient conditions

Operating temperature	min	°C	-25
	max	°C	+60


Storage temperature	min	°C	-40
	max	°C	+70

Resistance & Protection

Frontal IP degree	IP65
-------------------	------



Dimensions

STAR-DELTA STARTER, ENCLOSED STARTER, WITH START AND STOP/RESET BUTTONS.
STARTING TIME UP TO 12 SECONDS AND A MAXIMUM OF 30 OPERATIONS/HOUR, MAX IEC
OPERATING CURRENT 43A. COIL VOLTAGE 230VAC 50/60HZ

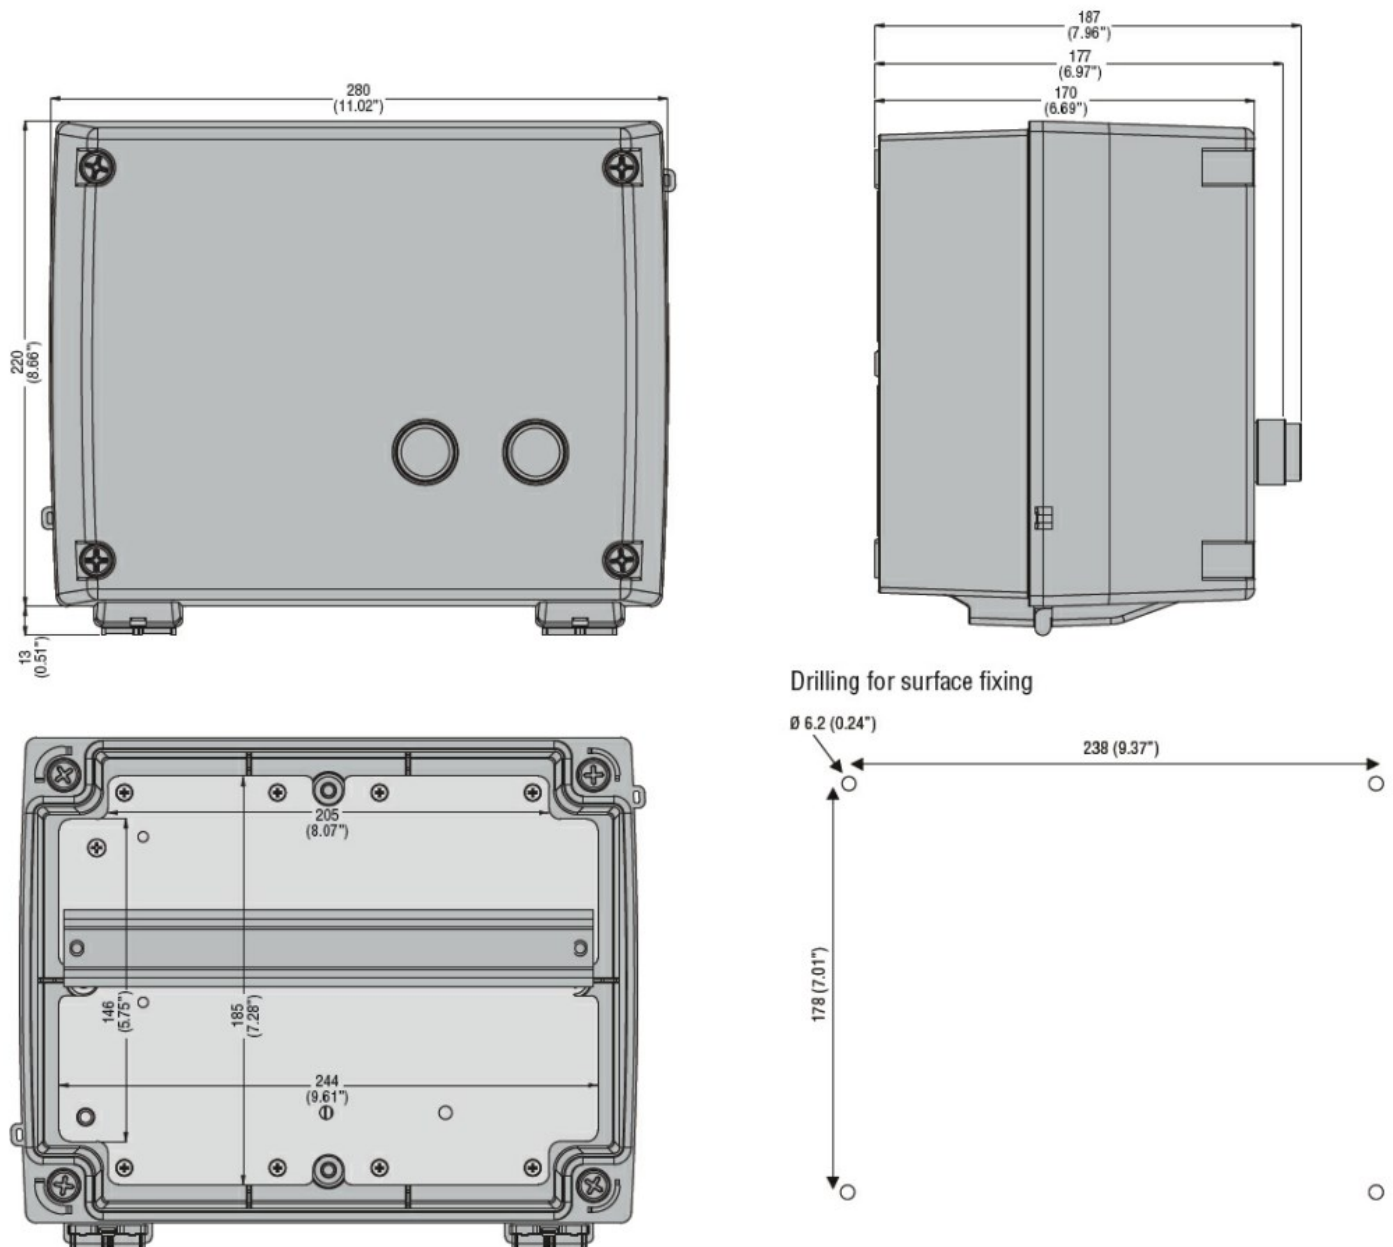

Wiring diagrams

STAR-DELTA STARTER, ENCLOSED STARTER, WITH START AND STOP/RESET BUTTONS.
STARTING TIME UP TO 12 SECONDS AND A MAXIMUM OF 30 OPERATIONS/HOUR, MAX IEC
OPERATING CURRENT 43A. COIL VOLTAGE 230VAC 50/60HZ

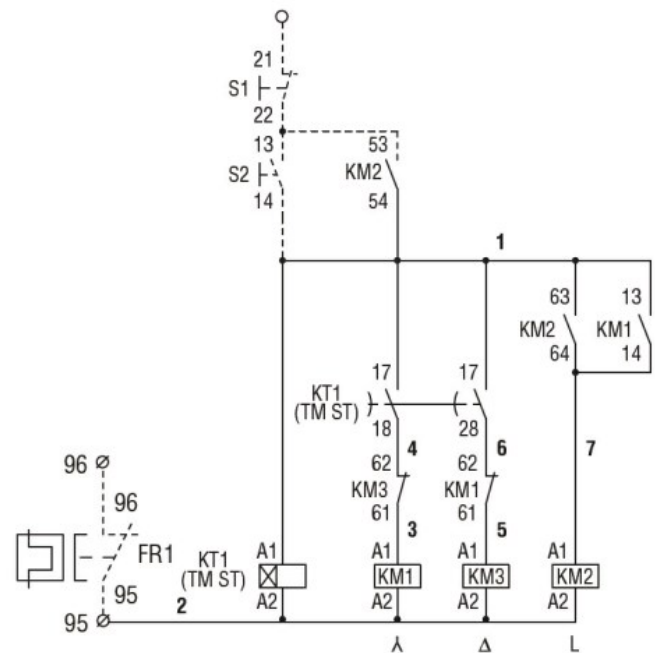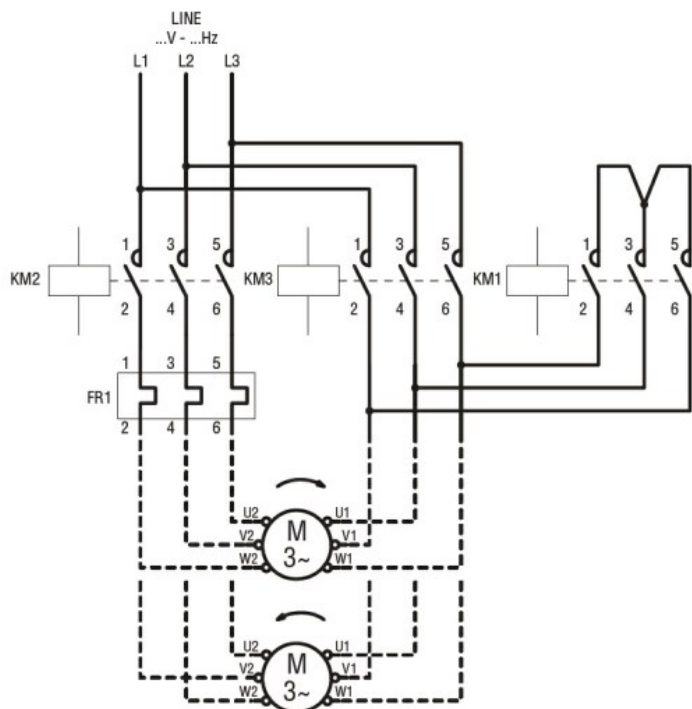

Certifications and compliance

Compliance

CSA C22.2 n° 14

for starters

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508

Certificates

/

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination