



Product designation

Rotary cam  
switches

Product type designation

7GN40

### General characteristics

Switching diagram

92 - ON/OFF  
switch 4 poles

N° of elements

2

Mounting form

U65 - Front  
mounting with  
red/yellow handle  
padlockable in 0  
and protection  
covers

### Contact characteristics

Rated insulation voltage  $U_i$

|        |   |     |
|--------|---|-----|
| IEC/EN | V | 690 |
| UL/CSA | V | 600 |

Rated impulse withstand voltage  $U_{imp}$

|    |   |
|----|---|
| kV | 6 |
|----|---|

Conventional free air thermal current  $I_{th}$

|        |   |    |
|--------|---|----|
| IEC/EN | A | 40 |
| UL/CSA | A | 50 |

Rated operational voltage

|   |     |
|---|-----|
| V | 480 |
|---|-----|

Rated operational impulse voltage

|    |   |
|----|---|
| kV | 4 |
|----|---|

Maximum fuse size for short-circuit protection  $I_n$  (gG)

|      |   |    |
|------|---|----|
| 10kA | A | 40 |
| 15kA | A | 40 |
| 25kA | A | 40 |
| 50kA | A | 40 |
| 63kA | A | 40 |

Rated short time current  $I_{cw}$

|     |    |      |
|-----|----|------|
| 1s  | kA | 1000 |
| 60s | A  | 1000 |

Conductivity

10/5 mA/V

Operational current  $I_e$  IEC/EN

AC1/AC21A

|   |    |
|---|----|
| A | 40 |
|---|----|

AC15

|          |   |    |
|----------|---|----|
| 110V     | A | 25 |
| 220/230V | A | 22 |
| 380/400V | A | 12 |
| 660/690V | A | 2  |

Rated operational power in AC

Three-phase AC-3

|          |    |    |
|----------|----|----|
| 220/230V | kW | 8  |
| 380/440V | kW | 15 |
| 500/690V | kW | 15 |

|                                        |          |                 |                   |
|----------------------------------------|----------|-----------------|-------------------|
| Single-phase AC-3                      |          |                 |                   |
|                                        | 110V     | kW              | 3                 |
|                                        | 220/230V | kW              | 6.5               |
|                                        | 380/440V | kW              | 8                 |
| Three-phase AC23A                      |          |                 |                   |
|                                        | 220/230V | kW              | 8                 |
|                                        | 380/440V | kW              | 18.5              |
|                                        | 500/690V | kW              | 22                |
| Single-phase AC23A                     |          |                 |                   |
|                                        | 110V     | kW              | 3                 |
|                                        | 220/230V | kW              | 6                 |
|                                        | 380/440V | kW              | 11                |
| Rated operational current in DC        |          |                 |                   |
| DC21A                                  |          |                 |                   |
|                                        | 48V      | A               | 40                |
|                                        | 60V      | A               | 40                |
|                                        | 110V     | A               | 6                 |
|                                        | 220V     | A               | 0.9               |
| DC23A (poles in series)                |          |                 |                   |
|                                        | 24V      | A               | 40 (1)            |
|                                        | 48V      | A               | 40 (2)            |
|                                        | 60V      | A               | 40 (3)            |
|                                        | 110V     | A               | 20 (3)            |
|                                        | 220V     | A               | 12 (4)            |
| DC13                                   |          |                 |                   |
|                                        | 24V      | A               | 40                |
|                                        | 48V      | A               | 32                |
|                                        | 60V      | A               | 16                |
|                                        | 110V     | A               | 3                 |
| Power dissipation                      |          | W               | 2.0               |
| Mechanical features                    |          |                 |                   |
| Terminals screw                        |          |                 | M4                |
| Tightening torque for terminals max    |          | Nm              | 1.2               |
| Conductor size                         |          |                 |                   |
| AWG - Rigid cable                      |          |                 |                   |
|                                        | min      | AWG             | 16                |
|                                        | Max      | AWG             | 8                 |
| AWG - Flexible cable                   |          |                 |                   |
|                                        | min      | AWG             | 16                |
|                                        | Max      | AWG             | 10                |
| Conductor size (IEC) - Flexible cable  |          |                 |                   |
|                                        | min      | mm <sup>2</sup> | 1.5               |
|                                        | Max      | mm <sup>2</sup> | 6                 |
| Conductor size (IEC) - Rigid cable     |          |                 |                   |
|                                        | min      | mm <sup>2</sup> | 1.5               |
|                                        | Max      | mm <sup>2</sup> | 10                |
| Mechanical life                        |          | cycles          | 5x10 <sup>6</sup> |
| UL technical data                      |          |                 |                   |
| Motor power for direct-on-line control |          |                 |                   |
| for three-phase motor                  |          |                 |                   |
|                                        | 120V     | HP              | 5                 |
|                                        | 240V     | HP              | 10                |
|                                        | 480V     | HP              | 20                |
|                                        | 600V     | HP              | 20                |

for single-phase motor

|      |    |   |
|------|----|---|
| 120V | HP | 2 |
| 240V | HP | 5 |

### Ambient conditions

Temperature

Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +55 |

Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +70 |

### Resistance & Protection


Frontal IP degree

IP40

Terminals IP degree

IP00


### Dimensions

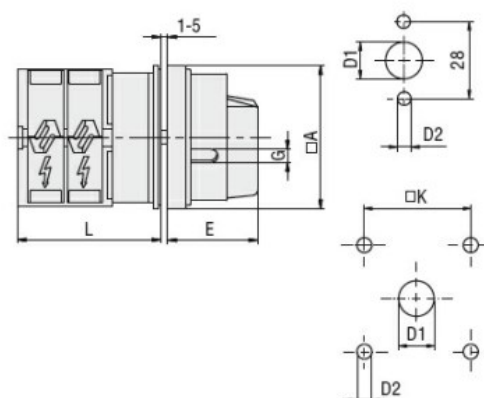

Standard drillings for 7GN125.  
Drillings on request for 4 screws fixing (4V version).

| Series | Dimensions |    |    |      |   |    | L    |      |          |       |
|--------|------------|----|----|------|---|----|------|------|----------|-------|
|        | □A         | D1 | D2 | E    | G | □K | 1    | 2    | 3.....12 |       |
| 7GN12  | 65         | 12 | 5  | 34.2 | 5 | 36 | 36.1 | 45.8 | 55.5     | 142.8 |
| 7GN20  | 65         | 12 | 5  | 34.2 | 5 | 36 | 36.1 | 45.8 | 55.5     | 142.8 |
| 7GN25  | 65         | 12 | 5  | 34.2 | 5 | 36 | 40.5 | 54.1 | 67.7     | 190.1 |
| 7GN32  | 65         | 14 | 5  | 38   | 6 | 48 | 46.5 | 61.6 | 76.7     | 212.6 |
| 7GN40  | 65         | 14 | 5  | 38   | 6 | 48 | 46.5 | 61.6 | 76.7     | 212.6 |
| 7GN63  | 65         | 14 | 5  | 38   | 6 | 48 | 50.3 | 68.4 | 86.5     | 249.4 |
| 7GN125 | 90         | 16 | 6  | 49   | 7 | 68 | 67.3 | 96.4 | 125.5    | 394.9 |

### Wiring diagrams

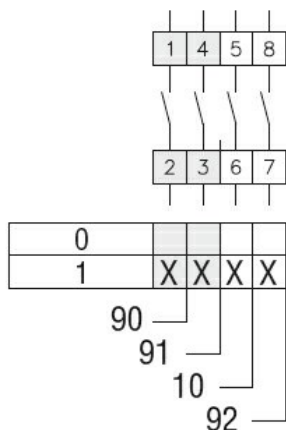

### Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus

EAC

UL

### ETIM classification

ETIM 8.0

EC001105 - Off-  
load switch