

Product designation	Rotary cam switches		
Product type designation	7GN125		
General characteristics			
Switching diagram	53 - Changeover switch 3 poles - 2 speed motor starting with separate windings		
N° of elements	3		
Mounting form	O - Rear mounting with black handle		
Contact characteristics			
Rated insulation voltage Ui	IEC/EN UL/CSA	V V	690 600
Rated impulse withstand voltage Uimp		kV	6
Conventional free air thermal current Ith	IEC/EN UL/CSA	A A	125 130
Rated operational voltage		V	690
Rated operational impulse voltage		kV	6
Maximum fuse size for short-circuit protection In (gG)	10kA 15kA 25kA 50kA 63kA	A A A A A	125 100 100 100 100
Rated short time current Icw	1s	kA	2100
Conductivity	10/5 mA/V		
Operational current Ie IEC/EN			
AC1/AC21A		A	125
AC15	110V 220/230V 380/400V 660/690V	A A A A	40 28 15 5
Rated operational power in AC			
Three-phase AC-3	220/230V 380/440V 500/690V	kW kW kW	18.5 37 33
Single-phase AC-3	110V 220/230V 380/440V	kW kW kW	5 11 15
Three-phase AC23A	220/230V 380/440V 500/690V	kW kW kW	30 45 37

Single-phase AC23A

110V	kW	5
220/230V	kW	11
380/440V	kW	15

Rated operational current in DC

DC21A

48V	A	125
60V	A	80
110V	A	10
220V	A	1.2

DC23A (poles in series)

24V	A	125 (1)
48V	A	125 (2)
60V	A	125 (3)
110V	A	50 (3)
220V	A	20 (4)

DC13

24V	A	125
48V	A	100
60V	A	50
110V	A	4

Power dissipation

W 6.3

Mechanical features

Terminals screw

M2X5

Tightening torque for terminals max

Nm 2

Conductor size

AWG - Rigid cable

min	AWG	14
Max	AWG	1/0

AWG - Flexible cable

min	AWG	14
Max	AWG	1/0

Conductor size (IEC) - Flexible cable

min	mm ²	2.5
Max	mm ²	50

Conductor size (IEC) - Rigid cable

min	mm ²	2.5
Max	mm ²	50

Mechanical life

cycles 1X10⁶

UL technical data

Motor power for direct-on-line control

for three-phase motor

120V	HP	15
240V	HP	25
480V	HP	50
600V	HP	40

for single-phase motor

120V	HP	5
240V	HP	15

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature


min °C -40
max °C +70

Resistance & Protection

Frontal IP degree IP40


Terminals IP degree IP00

Dimensions

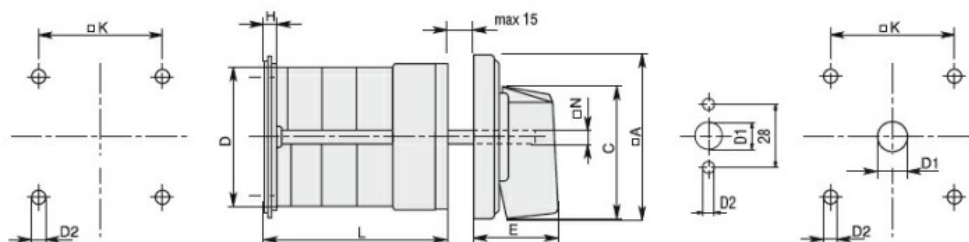

Series	Dimensions								L Number of elements											
	□A	C	ØD	ØD2	E	H	□K	□N	1	2	3	4	5	6	7	8	9	10	11	12
7GN12	48	39.5	39	5	26.5	5	36	6	38.1	47.8	57.5	67.2	76.9	86.6	96.3	106	115.7	125.4	135.1	144.8
7GN20	48	39.5	39	5	26.5	5	36	6	38.1	47.8	57.5	67.2	76.9	86.6	96.3	106	115.7	125.4	135.1	144.8
7GN25	48	39.5	43	5	26.5	5	36	6	42.5	56.1	69.7	83.3	96.9	110.5	124.1	137.7	151.3	164.9	178.5	192.1
7GN32	65	53	58	5	34.5	5.5	48	7	48.5	63.6	78.7	93.8	108.9	124	139.1	154.2	169.3	184.4	199.5	214.6
7GN40	65	53	58	5	34.5	5.5	48	7	48.5	63.6	78.7	93.8	108.9	124	139.1	154.2	169.3	184.4	199.5	214.6
7GN63	65	53	62	6	34.5	7.5	68	7	53.3	71.4	89.5	107.6	125.7	143.8	161.9	180	198.1	216.2	234.3	252.4
7GN125	90	70.5	86	6	41.4	7.5	68	9	74.8	103.9	133	162.1	191.2	220.3	249.4	278.5	307.6	336.7	365.8	394.9

Wiring diagrams

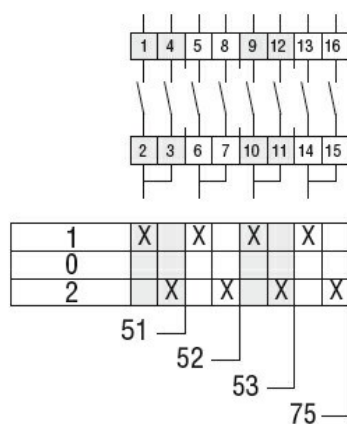

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

EAC

UL

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete