

Product designation			Enclosed rotary cam switch		
Product type designation			GX20		
General characteristics					
Switching diagram			52 - Changeover switch 2 poles		
N° of elements			2		
Mounting form			P - Plastic enclosure with black handle		
Contact characteristics					
Rated insulation voltage Ui			IEC/EN UL/CSA	V V	690 600
Rated impulse withstand voltage Uimp				kV	6
Conventional free air thermal current Ith			IEC/EN UL/CSA	A A	20 15
Rated operational voltage				V	440
Rated operational impulse voltage				kV	4
Maximum fuse size for short-circuit protection In (gG)			10kA 15kA 25kA	A A A	20 20 20
Rated short time current Icw			1s	kA	250
Conductivity			10/5 mA/V		
Operational current Ie IEC/EN					
AC1/AC21A				A	20
AC15			110V 220/230V 380/400V 660/690V	A A A A	10 8 6 1.5
Rated operational power in AC					
Three-phase AC-3			220/230V 380/440V 500/690V	kW kW kW	3.7 5.5 5.5
Single-phase AC-3			110V 220/230V 380/440V	kW kW kW	0.75 1.8 3
Three-phase AC23A			220/230V 380/440V 500/690V	kW kW kW	4 7.5 7.5
Single-phase AC23A			110V 220/230V 380/440V	kW kW kW	0.75 2.2 3.5
Rated operational current in DC					

ENCLOSED ROTARY CAM SWITCH GX SERIES, CHANGEOVER SWITCH 2 POLES 20A IN
PLASTIC ENCLOSURE 90X90MM WITH BLACK HANDLE

DC21A

48V	A	20
60V	A	20
110V	A	4
220V	A	0.6
440V	A	0.25

DC23A (poles in series)

24V	A	20 (1)
48V	A	20 (2)
60V	A	20 (3)
110V	A	10 (3)
220V	A	8 (4)

DC13

24V	A	20
48V	A	16
60V	A	12
110V	A	1
220V	A	0.4
440V	A	0.15

Power dissipation	W	0.6
-------------------	---	-----

Mechanical features

Terminals screw	M3
-----------------	----

Tightening torque for terminals max	Nm	0.8
-------------------------------------	----	-----

Conductor size

AWG - Rigid cable

min	AWG	20
Max	AWG	12

AWG - Flexible cable

min	AWG	20
Max	AWG	12

Conductor size (IEC) - Flexible cable

min	mm ²	0.5
Max	mm ²	2.5

Conductor size (IEC) - Rigid cable

min	mm ²	0.5
Max	mm ²	2.5

Mechanical life	cycles	1X10 ⁶
-----------------	--------	-------------------

UL technical data

Motor power for direct-on-line control

for three-phase motor

120V	HP	1.5
240V	HP	3
480V	HP	5
600V	HP	5

for single-phase motor

120V	HP	0.75
240V	HP	1.5

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
-----	----	-----


max °C +70

Resistance & Protection

Frontal IP degree IP65


Terminals IP degree IP20

Dimensions

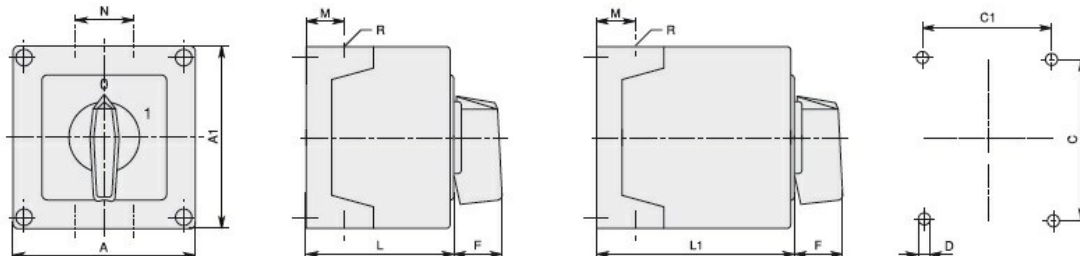

GX16	90x90	1 - 2	3 - 5	90	90	79	79	4.5	25	19	30	71.3	98.3	4xPG16	IP65
GX20		1 - 2	3 - 5												
GX16	110x110	1 - 3	4 - 7	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65
GX20		1 - 3	4 - 7												
GX32		1 - 2	3 - 4												
GX40		1 - 2	3 - 4												

Wiring diagrams

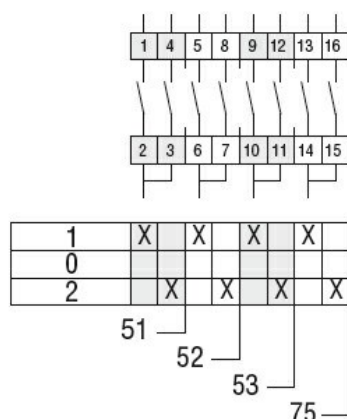

Certifications and compliance

Compliance

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete