

|                                                        |                                                                                                  |                  |                    |
|--------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------|--------------------|
| Product designation                                    | Rotary cam switches                                                                              |                  |                    |
| Product type designation                               | 7GN25                                                                                            |                  |                    |
| General characteristics                                |                                                                                                  |                  |                    |
| Switching diagram                                      | 90 - ON/OFF switch 1 pole                                                                        |                  |                    |
| N° of elements                                         | 1                                                                                                |                  |                    |
| Mounting form                                          | O98 - Rear mounting with red/yellow handle padlockable in 0, door coupling and protection covers |                  |                    |
| Contact characteristics                                |                                                                                                  |                  |                    |
| Rated insulation voltage Ui                            | IEC/EN<br>UL/CSA                                                                                 | V<br>V           | 690<br>600         |
| Rated impulse withstand voltage Uimp                   |                                                                                                  | kV               | 6                  |
| Conventional free air thermal current Ith              | IEC/EN<br>UL/CSA                                                                                 | A<br>A           | 25<br>30           |
| Rated operational voltage                              |                                                                                                  | V                | 480                |
| Rated operational impulse voltage                      |                                                                                                  | kV               | 4                  |
| Maximum fuse size for short-circuit protection In (gG) | 10kA<br>15kA<br>25kA                                                                             | A<br>A<br>A      | 25<br>25<br>25     |
| Rated short time current Icw                           | 1s                                                                                               | kA               | 400                |
| Conductivity                                           | 10/5 mA/V                                                                                        |                  |                    |
| Operational current Ie IEC/EN                          |                                                                                                  |                  |                    |
| AC1/AC21A                                              |                                                                                                  | A                | 25                 |
| AC15                                                   | 110V<br>220/230V<br>380/400V<br>660/690V                                                         | A<br>A<br>A<br>A | 16<br>12<br>8<br>2 |
| Rated operational power in AC                          |                                                                                                  |                  |                    |
| Three-phase AC-3                                       | 220/230V<br>380/440V<br>500/690V                                                                 | kW<br>kW<br>kW   | 5.5<br>7.5<br>7.5  |
| Single-phase AC-3                                      | 110V<br>220/230V<br>380/440V                                                                     | kW<br>kW<br>kW   | 1.5<br>3<br>5.5    |
| Three-phase AC23A                                      | 220/230V<br>380/440V<br>500/690V                                                                 | kW<br>kW<br>kW   | 6.5<br>11<br>11    |
| Single-phase AC23A                                     | 110V                                                                                             | kW               | 1.5                |


|                                        |          |                 |                   |
|----------------------------------------|----------|-----------------|-------------------|
|                                        | 220/230V | kW              | 3.7               |
|                                        | 380/440V | kW              | 5.5               |
| Rated operational current in DC        |          |                 |                   |
| DC21A                                  |          |                 |                   |
|                                        | 48V      | A               | 25                |
|                                        | 60V      | A               | 25                |
|                                        | 110V     | A               | 4                 |
|                                        | 220V     | A               | 0.7               |
| DC23A (poles in series)                |          |                 |                   |
|                                        | 24V      | A               | 25 (1)            |
|                                        | 48V      | A               | 25 (2)            |
|                                        | 60V      | A               | 25 (3)            |
|                                        | 110V     | A               | 12 (3)            |
|                                        | 220V     | A               | 10 (4)            |
| DC13                                   |          |                 |                   |
|                                        | 24V      | A               | 25                |
|                                        | 48V      | A               | 20                |
|                                        | 60V      | A               | 16                |
|                                        | 110V     | A               | 1.5               |
|                                        | 220V     | A               | 0.4               |
| Power dissipation                      |          | W               | 1.1               |
| Mechanical features                    |          |                 |                   |
| Terminals screw                        |          |                 | M3.5              |
| Tightening torque for terminals max    |          | Nm              | 0.8               |
| Conductor size                         |          |                 |                   |
| AWG - Rigid cable                      |          |                 |                   |
|                                        | min      | AWG             | 20                |
|                                        | Max      | AWG             | 10                |
| AWG - Flexible cable                   |          |                 |                   |
|                                        | min      | AWG             | 20                |
|                                        | Max      | AWG             | 12                |
| Conductor size (IEC) - Flexible cable  |          |                 |                   |
|                                        | min      | mm <sup>2</sup> | 0.5               |
|                                        | Max      | mm <sup>2</sup> | 4                 |
| Conductor size (IEC) - Rigid cable     |          |                 |                   |
|                                        | min      | mm <sup>2</sup> | 0.5               |
|                                        | Max      | mm <sup>2</sup> | 4                 |
| Mechanical life                        |          | cycles          | 5x10 <sup>6</sup> |
| UL technical data                      |          |                 |                   |
| Motor power for direct-on-line control |          |                 |                   |
| for three-phase motor                  |          |                 |                   |
|                                        | 120V     | HP              | 3                 |
|                                        | 240V     | HP              | 5                 |
|                                        | 480V     | HP              | 10                |
|                                        | 600V     | HP              | 15                |
| for single-phase motor                 |          |                 |                   |
|                                        | 120V     | HP              | 1.5               |
|                                        | 240V     | HP              | 3                 |
| Ambient conditions                     |          |                 |                   |
| Temperature                            |          |                 |                   |
| Operating temperature                  |          |                 |                   |
|                                        | min      | °C              | -25               |
|                                        | max      | °C              | +55               |
| Storage temperature                    |          |                 |                   |

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +70 |

### Resistance & Protection


|                     |      |
|---------------------|------|
| Frontal IP degree   | IP40 |
| Terminals IP degree | IP00 |

### Dimensions

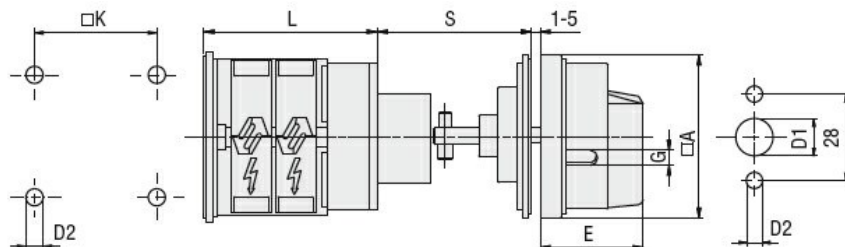

| Series | Dimensions |    |    |      |   |    |       | L    |      |        |       |
|--------|------------|----|----|------|---|----|-------|------|------|--------|-------|
|        | □A         | D1 | D2 | E    | G | □K | S     | 1    | 2    | 3...12 |       |
| 7GN12  | 65         | 12 | 5  | 34.2 | 5 | 36 | 45-55 | 41.1 | 50.8 | 60.5   | 147.8 |
| 7GN20  | 65         | 12 | 5  | 34.2 | 5 | 36 | 45-55 | 41.1 | 50.8 | 60.5   | 147.8 |
| 7GN25  | 65         | 14 | 5  | 38   | 6 | 48 | 45-55 | 51.5 | 66.6 | 81.7   | 217.6 |
| 7GN40  | 65         | 14 | 5  | 38   | 6 | 48 | 45-55 | 51.5 | 66.6 | 81.7   | 217.6 |
| 7GN63  | 65         | 14 | 6  | 38   | 6 | 68 | 45-55 | 57.3 | 75.4 | 93.5   | 256.4 |

### Wiring diagrams

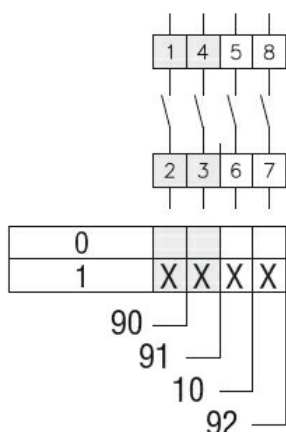

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-3  
IEC/EN/BS 60947-5-1  
UL60947-4-1

#### Certificates

cCSAus  
EAC  
UL

### ETIM classification

ETIM 8.0

EC001029 -  
Selector switch,  
complete