

Product designation			Rotary cam switches	
Product type designation			7GN20	
General characteristics				
Switching diagram			97 - Ammeter switch	
N° of elements			5	
Mounting form			O48 - Modular service cover for 35mm din rail mounting with black handle	
Contact characteristics				
Rated insulation voltage Ui			IEC/EN V	690
			UL/CSA V	600
Rated impulse withstand voltage Uimp			kV	6
Conventional free air thermal current Ith			IEC/EN A	20
			UL/CSA A	20
Rated operational voltage			V	480
Rated operational impulse voltage			kV	4
Maximum fuse size for short-circuit protection In (gG)			10kA A	20
			15kA A	16
			25kA A	16
Rated short time current Icw			1s kA	250
Conductivity			10/5 mA/V	
Operational current Ie IEC/EN AC1/AC21A			A	20
AC15			110V A	10
			220/230V A	8
			380/400V A	6
			660/690V A	1.5
Rated operational power in AC Three-phase AC-3			220/230V kW	3
			380/440V kW	5.5
			500/690V kW	5.5
Single-phase AC-3			110V kW	0.8
			220/230V kW	2.2
			380/440V kW	3
Three-phase AC23A			220/230V kW	5
			380/440V kW	7.5
			500/690V kW	7.5
Single-phase AC23A			110V kW	0.8
			220/230V kW	2.5

		380/440V	kW	3.7
Rated operational current in DC				
DC21A				
		48V	A	20
		60V	A	20
		110V	A	4
		220V	A	0.6
		440V	A	0.25
DC23A (poles in series)				
		24V	A	20 (1)
		48V	A	20 (2)
		60V	A	20 (3)
		110V	A	10 (3)
		220V	A	8 (4)
DC13				
		24V	A	20
		48V	A	16
		60V	A	12
		110V	A	1
		220V	A	0.4
		440V	A	0.15
Power dissipation			W	0.8
Mechanical features				
Terminals screw				M3
Tightening torque for terminals max			Nm	0.5
Conductor size				
AWG - Rigid cable				
		min	AWG	20
		Max	AWG	12
AWG - Flexible cable				
		min	AWG	20
		Max	AWG	14
Conductor size (IEC) - Flexible cable				
		min	mm ²	0.5
		Max	mm ²	2.5
Conductor size (IEC) - Rigid cable				
		min	mm ²	0.5
		Max	mm ²	2.5
Mechanical life			cycles	5x10 ⁶
UL technical data				
Motor power for direct-on-line control				
for three-phase motor				
		120V	HP	1.5
		240V	HP	3
		480V	HP	7.5
		600V	HP	10
for single-phase motor				
		120V	HP	0.75
		240V	HP	2
Ambient conditions				
Temperature				
Operating temperature				
		min	°C	-25
		max	°C	+55


Storage temperature

min °C -40
max °C +70

Resistance & Protection



Frontal IP degree	IP40
Terminals IP degree	IP00

Dimensions

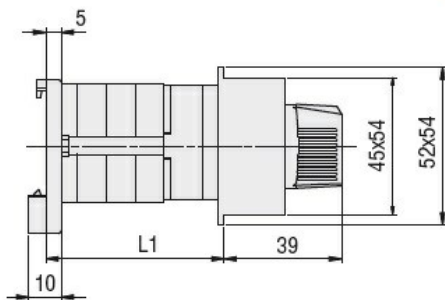

Series	L1		
	1	2	3
7GN12	38.1	47.8	57.5
7GN20	38.1	47.8	57.5
7GN25	42.5	56.1	69.7

Wiring diagrams

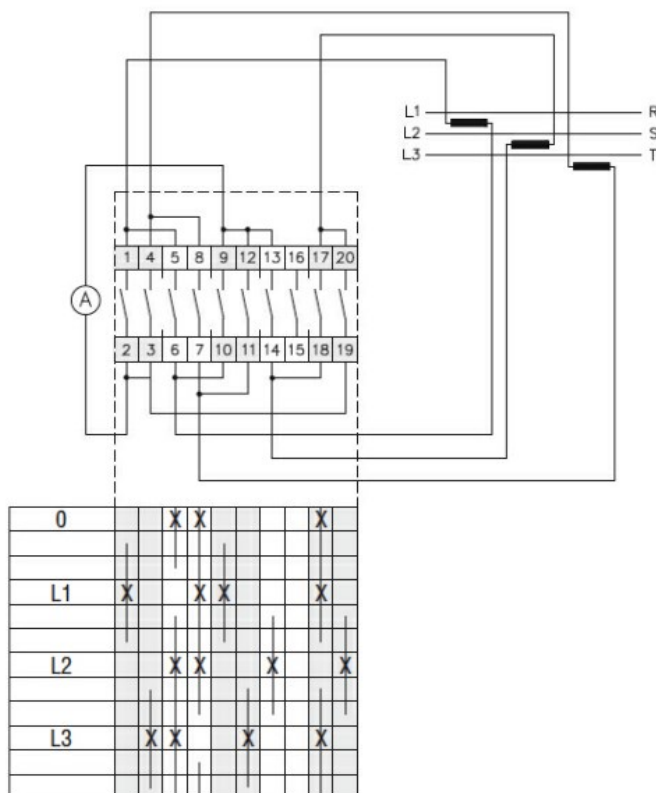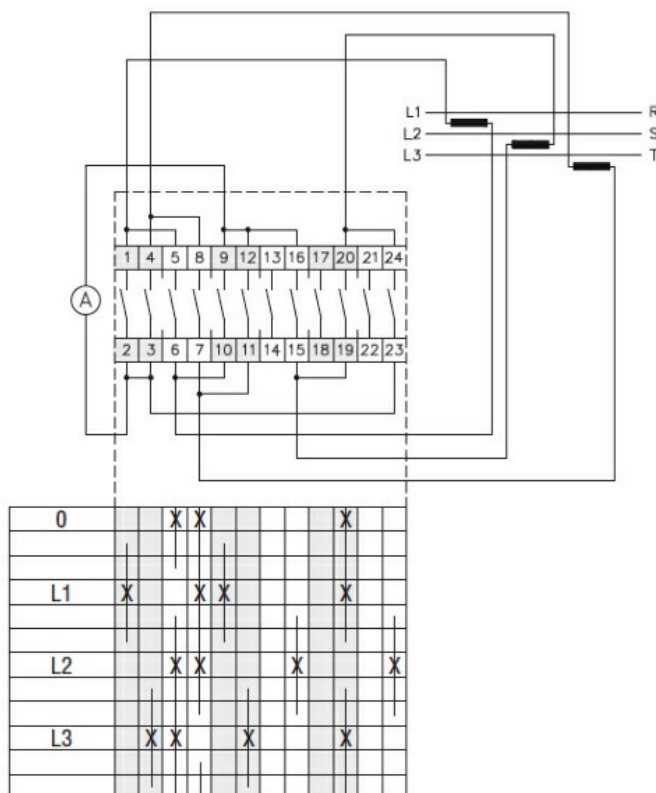

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete