



Product designation				Rotary cam switches
Product type designation				7GN12
General characteristics				
Switching diagram				92 - ON/OFF switch 4 poles
N° of elements				2
Mounting form				O98 - Rear mounting with red/yellow handle padlockable in 0, door coupling and protection covers
Contact characteristics				
Rated insulation voltage Ui				
				IEC/EN V 690
				UL/CSA V 600
Rated impulse withstand voltage Uimp				kV 6
Conventional free air thermal current Ith				
				IEC/EN A 16
				UL/CSA A 15
Rated operational voltage				V 480
Rated operational impulse voltage				kV 4
Maximum fuse size for short-circuit protection In (gG)				
				10kA A 16
				15kA A 10
				25kA A 10
Rated short time current Icw				
				1s kA 200
Conductivity				10/5 mA/V
Operational current Ie IEC/EN				
AC1/AC21A				A 16
AC15				
				110V A 10
				220/230V A 8
				380/400V A 4
				660/690V A 1.5
Rated operational power in AC				
Three-phase AC-3				
				220/230V kW 2.5
				380/440V kW 4
				500/690V kW 5.5
Single-phase AC-3				
				110V kW 0.8

ROTARY CAM SWITCH 7GN SERIES, ON-OFF SWITCH 4 POLES 16A, FOR REAR MOUNTING
WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION
COVERS, FRONT PLATE 65X65MM

	220/230V	kW	1.5
	380/440V	kW	2.2
Three-phase AC23A			
	220/230V	kW	3
	380/440V	kW	5.5
	500/690V	kW	7.5
Single-phase AC23A			
	110V	kW	0.8
	220/230V	kW	1.7
	380/440V	kW	3
Rated operational current in DC			
DC21A			
	48V	A	12
	60V	A	12
	110V	A	4
	220V	A	0.6
	440V	A	0.25
DC23A (poles in series)			
	24V	A	10 (1)
	48V	A	10 (2)
	60V	A	10 (3)
	110V	A	5 (3)
	220V	A	5 (4)
DC13			
	24V	A	12
	48V	A	10
	60V	A	8
	110V	A	1
	220V	A	0.4
	440V	A	0.15
Power dissipation		W	0.8
Mechanical features			
Terminals screw			M3
Tightening torque for terminals max		Nm	0.5
Conductor size			
AWG - Rigid cable			
	min	AWG	20
	Max	AWG	12
AWG - Flexible cable			
	min	AWG	20
	Max	AWG	14
Conductor size (IEC) - Flexible cable			
	min	mm ²	0.5
	Max	mm ²	2.5
Conductor size (IEC) - Rigid cable			
	min	mm ²	0.5
	Max	mm ²	2.5
Mechanical life		cycles	3x10 ⁶
UL technical data			
Motor power for direct-on-line control			
for three-phase motor			
	120V	HP	1.5
	240V	HP	3
for single-phase motor			

120V	HP	0.5
240V	HP	1

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Resistance & Protection


Frontal IP degree

IP40

Terminals IP degree


IP00

Dimensions

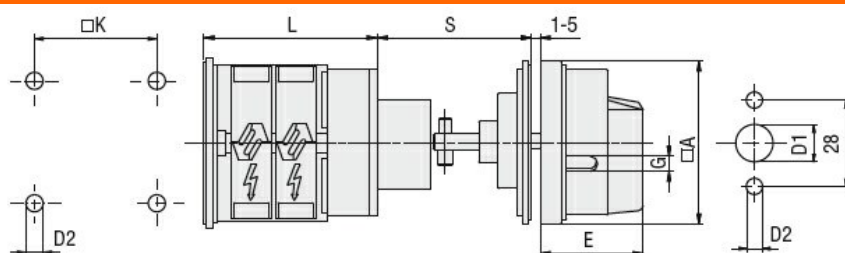

Series	Dimensions							L			
	□A	D1	D2	E	G	□K	S	1	2	3...12	
7GN12	65	12	5	34.2	5	36	45-55	41.1	50.8	60.5	147.8
7GN20	65	12	5	34.2	5	36	45-55	41.1	50.8	60.5	147.8
7GN25	65	14	5	38	6	48	45-55	51.5	66.6	81.7	217.6
7GN40	65	14	5	38	6	48	45-55	51.5	66.6	81.7	217.6
7GN63	65	14	6	38	6	68	45-55	57.3	75.4	93.5	256.4

Wiring diagrams

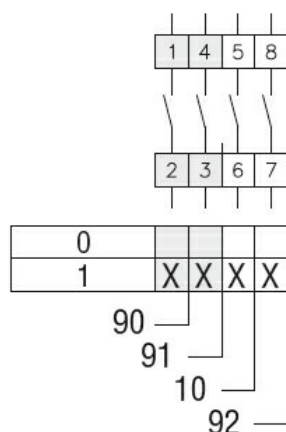

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete