# 7GN2519P25

ENCLOSED ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR CONTROL SWITCH 0-1-2, 25A IN PLASTIC ENCLOSURE 90X90MM WITH RED/YELLOW HANDLE

| | | | |
|---|---|---|---|
| Product designation | | | Enclosed rotary cam switch |
| Product type designation | | | 7GN25 |
| **General characteristics** | | | |
| Switching diagram | | | 19 - Dahlander motor control switch 0-1-2 |
| N° of elements | | | 4 |
| Mounting form | | | P25 - Plastic enclosure with red/yellow handle |
| **Contact characteristics** | | | |
| Rated insulation voltage Ui | | | |
| | IEC/EN | V | 690 |
| | UL/CSA | V | 600 |
| Rated impulse withstand voltage Uimp | | kV | 6 |
| Conventional free air thermal current Ith | | | |
| | IEC/EN | A | 25 |
| | UL/CSA | A | 30 |
| Rated operational voltage | | V | 480 |
| Rated operational impulse voltage | | kV | 4 |
| Maximum fuse size for short-circuit protection In (gG) | | | |
| | 10kA | A | 25 |
| | 15kA | A | 25 |
| | 25kA | A | 25 |
| Rated short time current Icw | | | |
| | 1s | kA | 400 |
| Conductivity | | | 10/5 mA/V |
| Operational current Ie IEC/EN | | | |
| AC1/AC21A | | | |
| | | A | 25 |
| AC15 | | | |
| | 110V | A | 16 |
| | 220/230V | A | 12 |
| | 380/400V | A | 8 |
| | 660/690V | A | 2 |
| Rated operational power in AC | | | |
| Three-phase AC-3 | | | |
| | 220/230V | kW | 5.5 |
| | 380/440V | kW | 7.5 |
| | 500/690V | kW | 7.5 |
| Single-phase AC-3 | | | |
| | 110V | kW | 1.5 |
| | 220/230V | kW | 3 |
| | 380/440V | kW | 5.5 |
| Three-phase AC23A | | | |
| | 220/230V | kW | 6.5 |
| | 380/440V | kW | 11 |
| | 500/690V | kW | 11 |
| Single-phase AC23A | | | |
| | 110V | kW | 1.5 |
| | 220/230V | kW | 3.7 |
| | 380/440V | kW | 5.5 |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | | | | |
|---|---|---|---|---|
| Rated operational current in DC | | | | |
| | DC21A | | | |
| | | 48V | A | 25 |
| | | 60V | A | 25 |
| | | 110V | A | 4 |
| | | 220V | A | 0.7 |
| | DC23A (poles in series) | | | |
| | | 24V | A | 25 (1) |
| | | 48V | A | 25 (2) |
| | | 60V | A | 25 (3) |
| | | 110V | A | 12 (3) |
| | | 220V | A | 10 (4) |
| | DC13 | | | |
| | | 24V | A | 25 |
| | | 48V | A | 20 |
| | | 60V | A | 16 |
| | | 110V | A | 1.5 |
| | | 220V | A | 0.4 |
| Power dissipation | | | W | 1.1 |
| **Mechanical features** | | | | |
| Terminals screw | | | | M3.5 |
| Tightening torque for terminals max | | | Nm | 0.8 |
| Conductor size | | | | |
| | AWG - Rigid cable | | | |
| | | min | AWG | 20 |
| | | Max | AWG | 10 |
| | AWG - Flexible cable | | | |
| | | min | AWG | 20 |
| | | Max | AWG | 12 |
| | Conductor size (IEC) - Flexible cable | | | |
| | | min | mm² | 0.5 |
| | | Max | mm² | 4 |
| | Conductor size (IEC) - Rigid cable | | | |
| | | min | mm² | 0.5 |
| | | Max | mm² | 4 |
| Mechanical life | | | cycles | 5x10⁶ |
| **UL technical data** | | | | |
| Motor power for direct-on-line control | | | | |
| | for three-phase motor | | | |
| | | 120V | HP | 3 |
| | | 240V | HP | 5 |
| | | 480V | HP | 10 |
| | | 600V | HP | 15 |
| | for single-phase motor | | | |
| | | 120V | HP | 1.5 |
| | | 240V | HP | 3 |
| **Ambient conditions** | | | | |
| Temperature | | | | |
| | Operating temperature | | | |
| | | min | °C | -25 |
| | | max | °C | +55 |
| | Storage temperature | | | |
| | | min | °C | -40 |
| | | max | °C | +70 |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

# 7GN2519P25

ENCLOSED ROTARY CAM SWITCH 7GN SERIES, DAHLANDER MOTOR CONTROL SWITCH 0-1-2, 25A IN PLASTIC ENCLOSURE 90X90MM WITH RED/YELLOW HANDLE

## Resistance & Protection

| | |
|---|---|
| Frontal IP degree | IP65 |
| Terminals IP degree | IP00 |

## Dimensions

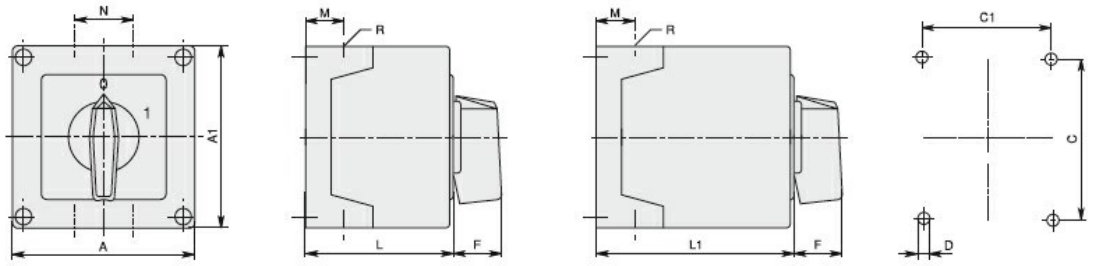


| Series | Enclosure size | Number of elements L | Number of elements L1 | Dimensions A | A1 | C | C1 | D | F | M | N | L | L1 | Cable entry | Protection degree |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 7GN12 | 75x75 | 1 - 2 | 3 - 4 | 75 | 75 | 50 | 64 | 4.5 | 19 | 14 | 28 | 57.5 | 79.8 | 4xPG13.5 | IP65 |
| 7GN20 | | 1 - 2 | 3 - 4 | | | | | | | | | | | | |
| 7GN25 | | 1 | 2 - 3 | | | | | | | | | | | | |
| 7GN12 | 90x90 | 1 - 3 | 4 - 6 | 90 | 90 | 79 | 63 | 4.5 | 25 | 19 | 30 | 71.3 | 98.3 | 4xPG16 | IP65 |
| 7GN20 | | 1 - 3 | 4 - 6 | | | | | | | | | | | | |
| 7GN25 | | 1 - 2 | 3 - 4 | | | | | | | | | | | | |
| 7GN32 | | 1 - 2 | 3 - 4 | | | | | | | | | | | | |
| 7GN40 | | 1 | 2 - 3 | | | | | | | | | | | | |
| 7GN12 | 110x110 | 1 - 4 | 5 - 8 | 110 | 110 | 98.4 | 83 | 4.5 | 32 | 21 | 39.5 | 85.5 | 119.5 | 4xPG21 | IP65 |
| 7GN20 | | 1 - 4 | 5 - 8 | | | | | | | | | | | | |
| 7GN25 | | 1 - 3 | 4 - 5 | | | | | | | | | | | | |
| 7GN32 | | 1 - 3 | 4 - 5 | | | | | | | | | | | | |
| 7GN40 | | 1 - 2 | 3 - 5 | | | | | | | | | | | | |
| 7GN63 | | 1 - 2 | 3 - 4 | | | | | | | | | | | | |
| 7GN32 | 125x175 | 1 - 3 | 4 - 5 | 125 | 175 | 146 | 112 | 5.5 | 32 | 21 | 68 | 84.3 | 118.3 | 4xPG21 2xPG11 | IP65 |
| 7GN40 | | 1 - 2 | 3 - 4 | | | | | | | | | | | | |
| 7GN63 | | 1 - 2 | 3 - 4 | | | | | | | | | | | | |
| 7GN125 | | 1 | 2 | | | | | | | | | | | | |
| 7GN32 | 180x254 | 1 - 5 | 6 - 8 | 180 | 254 | 120 | 190 | 5.5 | 32 | 35 | 76 | 121 | 175 | 4xPG29 2xPG11 | IP65 |
| 7GN40 | | 1 - 4 | 5 - 7 | | | | | | | | | | | | |
| 7GN63 | | 1 - 3 | 4 - 6 | | | | | | | | | | | | |
| 7GN125 | | 1 - 2 | 3 - 4 | | | | | | | | | | | | |

## Wiring diagrams

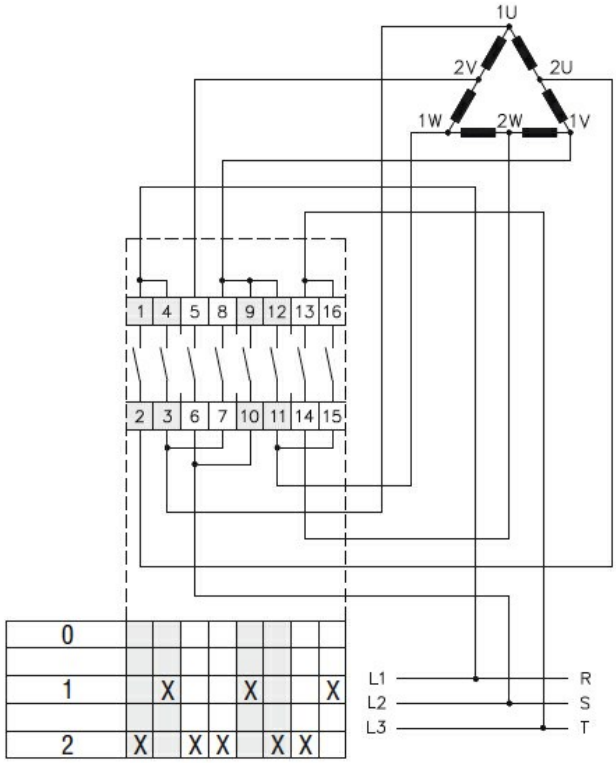


## Certifications and compliance


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Compliance

| | |
|---|---|
| | IEC/EN/BS 60947-1 |
| | IEC/EN/BS 60947-3 |
| | IEC/EN/BS 60947-5-1 |

Certificates

| | |
|---|---|
| | EAC |

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC001029 - Selector switch, complete |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding