

Product designation			Rotary cam switches		
Product type designation			GN315		
General characteristics					
Switching diagram			69 - Changeover switch without 0 4 poles		
N° of elements			4		
Mounting form			U - Front mounting with black handle		
Contact characteristics					
Rated insulation voltage Ui			IEC/EN	V	690
			UL/CSA	V	600
Rated impulse withstand voltage Uimp			kV	8	
Conventional free air thermal current Ith			IEC/EN	A	315
			UL/CSA	A	255
Rated operational voltage			V	690	
Rated operational impulse voltage			kV	6	
Maximum fuse size for short-circuit protection In (gG)			10kA	A	315
			15kA	A	315
Rated short time current Icw			1s	kA	5200
Operational current Ie IEC/EN AC1/AC21A			A	315	
Rated operational power in AC Three-phase AC-3			220/230V	kW	37
			380/440V	kW	55
			500/690V	kW	69
Single-phase AC-3			110V	kW	11
			220/230V	kW	22
			380/440V	kW	30
Rated operational current in DC DC21A			48V	A	200
			60V	A	200
			110V	A	35
			220V	A	2.5
			440V	A	0.9
Power dissipation			W	64.5	
Mechanical features					
Terminals screw			M10		
Tightening torque for terminals max			Nm	10	
Conductor size			AWG - Rigid cable		
			Max	AWG	1XMCM350
AWG - Flexible cable					

ROTARY CAM SWITCH GN SERIES, CHANGEOVER SWITCH WITHOUT 0, 4 POLES 315A,
FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 132X132MM

	Max	AWG	1XMCM350
Conductor size (IEC) - Flexible cable	Max	mm ²	1X185
Conductor size (IEC) - Rigid cable	Max	mm ²	1X185
Mechanical life		cycles	2X10 ⁵

UL technical data

Motor power for direct-on-line control

for three-phase motor

120V	HP	30
240V	HP	50
480V	HP	100
600V	HP	75

for single-phase motor

120V	HP	15
240V	HP	30

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Resistance & Protection


Frontal IP degree

IP40

Terminals IP degree

IP00


Dimensions

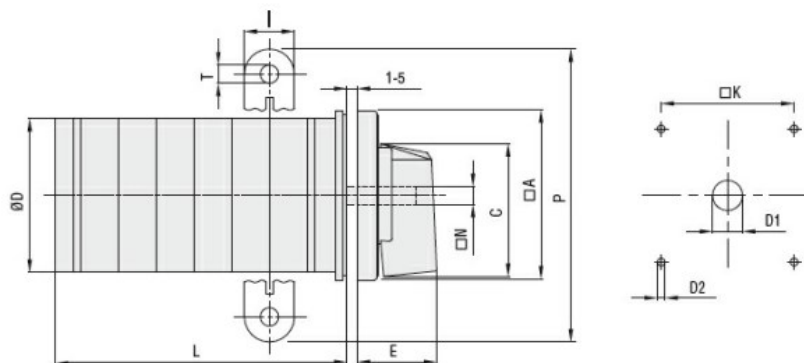

Series	Dimensions											L Number of elements ①											
	ØA	C	ØD	ØD1	ØD2	E	I	ØK	ØN	P	ØT	1	2	3	4	5	6	7	8	9	10	11	12
GN200	132	104	120	16	5.3	56	20	104	10	140	10.5	77	107	136	166	196	226	284	314	343	373	402	432
GN315	132	104	120	16	5.3	56	20	104	10	145	10.5	77	107	136	166	196	226	284	314	343	373	402	432

① For devices with 6 or more elements please consult Technical support, see contact details on inside front cover.

Wiring diagrams

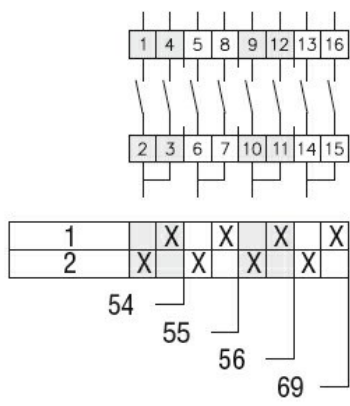

Certifications and compliance

Compliance

IEC/EN/BS 60947-1
IEC/EN/BS 60947-3
IEC/EN/BS 60947-5-1
UL60947-4-1

Certificates

UR

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete