





Product designation				Switch disconnecter with fuse
Product type designation				GEF
Type of fuse				NFC
Number of poles	Nr.			3
Operating voltage type				AC
Contact characteristics				
IEC Conventional free air thermal current I _{th}	A			100
Rated insulation voltage U _i IEC/EN	V			1000
Rated impulse withstand voltage U _{imp}	kV			8
Operating current I _e				
AC21A	400V	A		100
	500V	A		100
AC22A	400V	A		100
	500V	A		80
AC23A	400V	A		100
	500V	A		63
Power dissipation per pole max	W			9
Conditional short-circuit current (rms)	kA			100
Making capacity AC23A 400V	A			800
Breaking capacity AC23A 400V	A			640
Mechanical life	cycles			10000
Mechanical features				
Operating position	normal allowable			Vertical plan Any
Fixing				Screw
Terminals	type			Hex terminals
Tightening torque for terminals	max	Nm		2
	max	lbin		17.7
Weight	g			1000
UL technical data				
Operating voltage max	V			500
Ambient conditions				
Operating temperature	min	°C		-25
	max	°C		55
Storage temperature	min	°C		-40

	max	°C	70
Max altitude		m	3000
Resistance & Protection			
Frontal IP degree			IP20
Terminals IP degree			IP20
Pollution degree			3

Dimensions

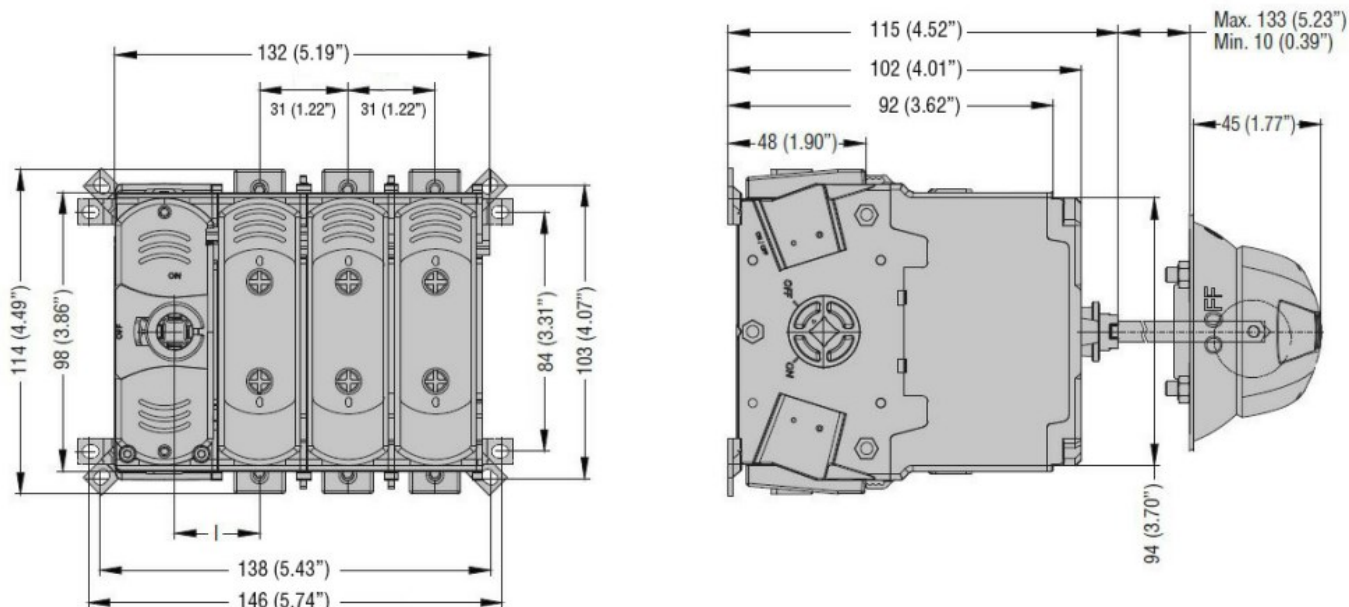

Wiring diagrams

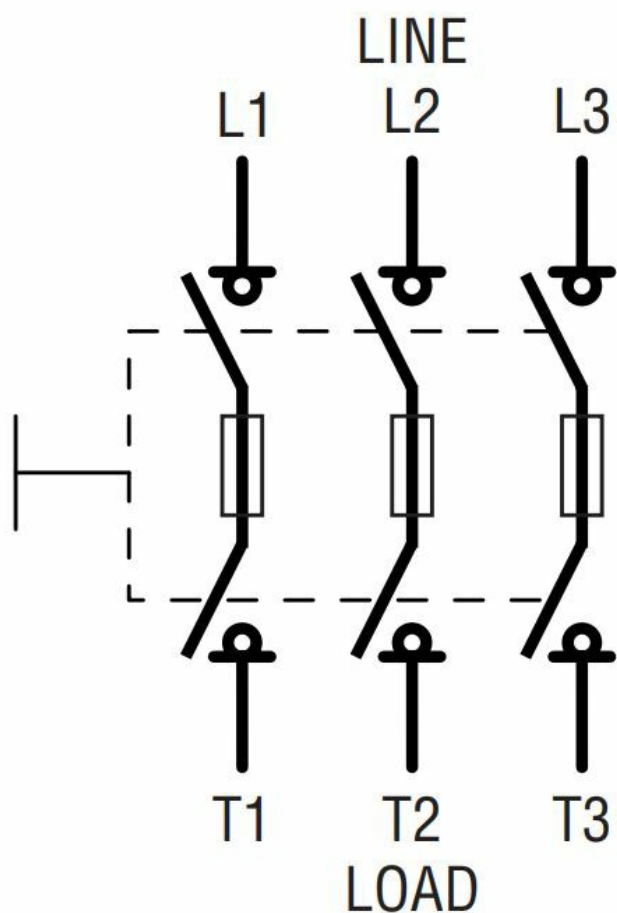

Certifications and compliance

Compliance	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-3
Certifications	CE
	UKCA

ETIM classification

ETIM 8.0	EC000216 - Switch disconnector
----------	--------------------------------------