


KCE-ECO single wire labeling

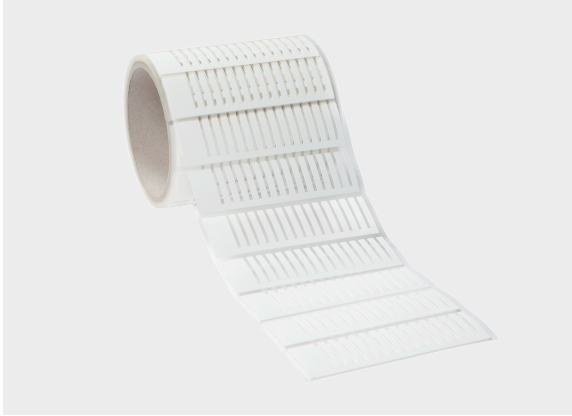

Product information

The KCE-ECO label plates are made of PE composite material on a transparent carrier film and a 3" core; they can be used as an alternative to the PC labels in the KS series.



Each of the individual labels is 4 mm wide and available in lengths of 12 mm, 18 mm, 23 mm or 30 mm.

In addition to the label length, there is a 10 mm section for bending, which can also be used to print additional information.

The plate is bent by 180° at the bending point and pushed into the sleeve, where it is then held in place by bracing.

Suitable formp-TM series thermal transfer printers.

Information, conformities and approvals



Article	Order No.	Color	Sheet size Length x width mm	No. columns	Roll width mm	Recommended Colour ribbon	Software Article	PU pcs.
KCE-ECO 4x12	86513000	White	12 x 4	1	104	FB-TM 110 mm x 300 m	QA0	10000
KCE-ECO 4x18	86513001	White	18 x 4	1	104	FB-TM 110 mm x 300 m	QA1	10000
KCE-ECO 4x23	86513002	White	23 x 4	1	104	FB-TM 110 mm x 300 m	QA2	10000
KCE-ECO 4x30	86513003	White	30 x 4	1	104	FB-TM 110 mm x 300 m	QA3	10000

Material properties



Polyethylene (PE) II

Thermal properties



Temperature / temperature range -40 °C - 90 °C



KCE-ECO single wire labeling

Technical information



Halogen-free



Silicone-free



Interior

Classification



ETIM 9: EC001530 || eClass 14: 27281102 || UNSPSC: 39131504 ||

General technical data



High tensile strength and tear resistanceIn compliance with the requirements of REACH and RoHS



High tensile strength and tear resistanceIn compliance with the requirements of REACH and RoHS

Labelling technology



Thermal transfer