




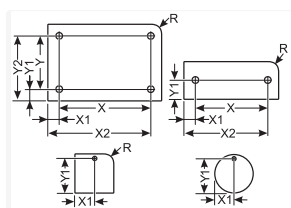

## ALM Rectangular without radius, 4x hole

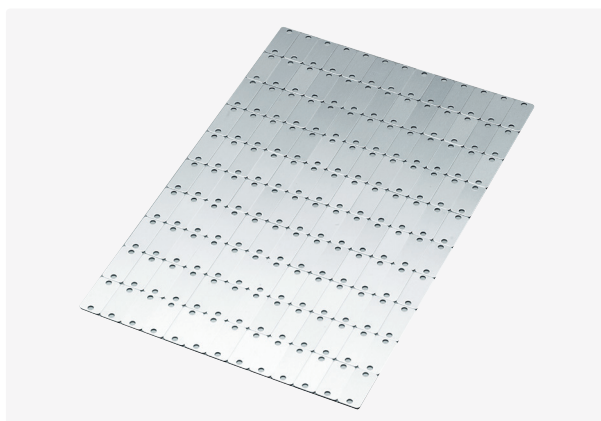

### Product information

- Triple-layer material (aluminium-plastic-aluminium)
- Black plastic inner layer
- Outer layer in silver or gold
- Available with self-adhesive foil / adhesive foil
- Thickness: 1.5 mm
- marking technique: Engraving

ALUMATT products are high pressure decorative laminated sheets, preferably in plain colours. In contrast to standard laminates, Alumatt has a three-layer symmetrical structure of melamine resin impregnated cellulose sheeting. The colour of all layers is exactly defined. The colours of both outer layers are usually in stark contrast to the core colour. This colour contrast makes the engraving very readable. For engraving, the outer layers are kept very thin. The layer thickness is approximately 0.08 mm. The plain papers are homogeneously coloured in the mass. The colour connection is secured with these paper qualities. The base is free of heavy metals and has a high level of light stability.

Color: Silver / Black / Silver  
Material thickness mm: 1.5


### Information, conformities and approvals



Article	Order No.	Label size mm	Number x Holes mm	Quantity per mat	Software Article	PU pcs.
<b>Without corner radius; with adhesive foil</b>						
ALM 60x100 HF, 4x3.3MM <sup>1)</sup>	8603246001	60 x 100	4x 3.3	10	906	10
ALM 85x65 HF, 4x4.0MM <sup>1)</sup>	8603246006	85 x 65	4x 4.0	9	H86	9
ALM 100x40 HF, 4x3.3MM <sup>1)</sup>	8603246000	100 x 40	4x 3.3	15	905	15
ALM 100x200 HF, 4x2.6MM <sup>1)</sup>	8603246005	100 x 200	4x 2.6	3	9K	3
ALM 125x125 HF, 4x3.5MM <sup>1)</sup>	8603246002	125 x 125	4x 3.5	2	6C	2
ALM 140x180 HF, 4x3.0MM <sup>1)</sup>	8603246011	140 x 180	4x 3.0	2	Z77	2
ALM 140x200 HF, 4x3.0MM <sup>1)</sup>	8603246008	140 x 200	4x 3.0	2	L56	2
ALM 150x75 HF, 4x3.2MM <sup>1)</sup>	8603246007	150 x 75	4x 3.2	4	J45	4
ALM 150x115 HF, 4x3.5MM <sup>1)</sup>	8603246003	150 x 115	4x 3.5	2	6D	2



## ALM Rectangular without radius, 4x hole

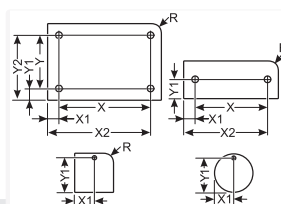

Article	Order No.	Label size mm	Number x Holes mm	Quantity per mat	Software Article	PU pcs.
ALM 300x100 HF, 4x3.0MM <sup>1)</sup>	8603246009	300 x 100	4x 3.0	2	L57	2
ALM 220x60 HF, 4x3.5MM <sup>1)</sup>	8603246028	220 x 60	4x 3.5	3	A3H	3
ALM 230x150 HF, 4x3.5MM (E) <sup>1)</sup>	8603246004	230 x 150	4x 3.5	1	6E	1
<b>Without corner radius; with self-adhesive foil</b>						
ALM 80x200 SK, 4x3.2MM <sup>1)</sup>	8603240002	80 x 200	4x 3.2	3	U17	3
ALM 85x65 SK, 4x4.0MM <sup>1)</sup>	8603240006	85 x 65	4x 4.0	9	H73	9
ALM 125x45 SK, 4x3.0MM <sup>1)</sup>	8603240005	125 x 45	4x 3.0	8	B48	8
ALM 125x65 SK, 4x3.0MM <sup>1)</sup>	8603240004	125 x 65	4x 3.0	6	B38	6
ALM 125x80 SK, 4x3.0MM <sup>1)</sup>	8603240003	125 x 80	4x 3.0	4	B37	4
ALM 150x100 SK, 4x3.5MM <sup>1)</sup>	8603240000	150 x 100	4x 3.5	4	228	4
ALM 205x105 SK, 4x3.2MM (E) <sup>1)</sup>	8603240001	205 x 105	4x 3.2	1	U16	6
<sup>1)</sup> Other sizes available on request						

## Engraving material Dimension table

Article	Order No.	Drill hole pitch X mm	Drill hole pitch Y mm	Drill hole position X1 mm	Drill hole position Y1 mm	Drill hole position X2 mm
---------	-----------	-----------------------	-----------------------	---------------------------	---------------------------	---------------------------

**Without corner radius; with adhesive foil**



## ALM Rectangular without radius, 4x hole

### Material properties



Alumatt (ALM)

### Adhesive properties



467 SK adhesive film with adhesive

### Thermal properties



Temperature / temperature range -40 °C – 80 °C

### Fire properties



Fire classification B2

### General technical data



Single-line and multi-line labelling

### Assembly method



Adhesive system



Screw system

### Labelling technology



Engraving