
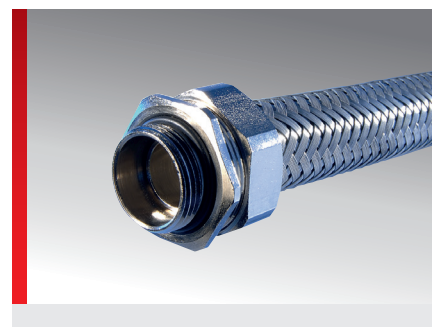
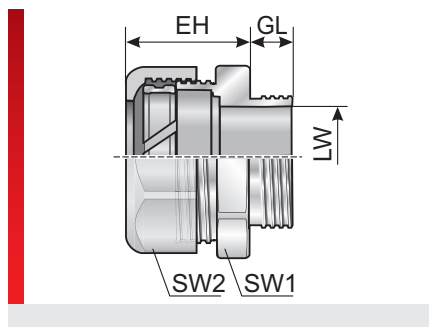


Type EH-EMV

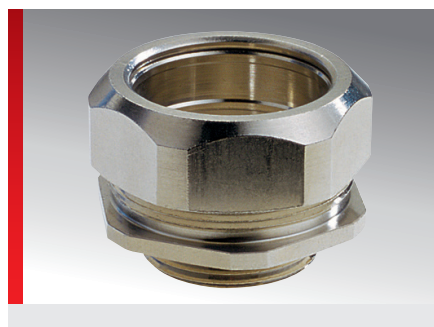

PRODUCT INFORMATION

The EH-EMV metal fitting can be used together with the EMC cable protection conduit EW-PAP. The EH-EMV fitting is used to discharge sheath currents on the cable protection conduit safely and reliably.

SPECIFICATIONS



Brass nickel-plated



-40 – 140 °C short term 160 °C



IP40



Article	Order No.	Color	Connecting thread	Suitable for Murrflex EW	Suitable for Murrflex EW-PAP	GL mm	EH mm	LW mm	SW mm	PU pcs.
EH-EMV M12x1.5	83521050	Silver	M12x1,5	M12/P09	M12/P9	5.50	17.00	7.90	22.00	10
EH-EMV M16x1.5	83521052	Silver	M16x1,5	M16/P11	M16/P11	5.80	17.50	10.30	27.00	10
EH-EMV M20x1.5	83521054	Silver	M20x1,5	M20/P16	M20/P16	7.00	19.00	14.40	31.00	10
EH-EMV M25x1.5	83521056	Silver	M25x1,5	M25/P21	M25/P21	7.00	22.00	18.50	40.00	10
EH-EMV M32x1.5	83521058	Silver	M32x1,5	M32/P29	M32/P29	7.00	24.00	25.80	48.00	10
EH-EMV M40x1.5	83521060	Silver	M40x1,5	M40/P36	M40/P36	11.00	27.00	32.90	60.00	2
EH-EMV M50x1.5 ¹⁾	83521062	Silver	M50x1,5	M50/P48	M50/P48	11.50	31.00	41.00	78.00	2
No stock goods, delivery time and minimum order quantities upon request										
EH-EMV Pg 09	83521010	Silver	PG 09	M12/P09	M12/P9	6.00	17.00	12.00	22.00	10
EH-EMV Pg 11	83521012	Silver	PG 11	M16/P11	M16/P11	6.00	18.00	15.50	27.00	10
EH-EMV Pg 16	83521014	Silver	PG 16	M20/P16	M20/P16	7.00	20.00	18.50	31.00	10
EH-EMV Pg 21	83521016	Silver	PG 21	M25/P21	M25/P21	7.00	23.00	24.00	40.00	10
EH-EMV Pg 29	83521018	Silver	PG 29	M32/P29	M32/P29	7.00	26.00	33.00	48.00	10
EH-EMV Pg 36	83521020	Silver	PG 36	M40/P36	M40/P36	7.50	30.00	43.00	57.00	2
EH-EMV Pg 48 ²⁾	83521022	Silver	PG 48	M50/P48	M50/P48	11.00	32.00	54.00	78.00	2

¹⁾ Min. order quantity 100 pcs

²⁾ No stock goods, delivery time and minimum order quantities upon request

MATERIAL PROPERTIES



Material
Brass nickel-plated

THERMAL PROPERTIES



Temperature / temperature range
-40 – 140 °C short term 160 °C

Type EH-EMV

PROTECTION CLASS

IP Protection class
IP40

CONFORMITY

RoHS RoHS (EC Directive 2011/65/EU)

Hose connection, special threading

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID_65630~20230618~890283~suv_eh_emv