

Product designation			Rotary cam switches		
Product type designation			GX32		
General characteristics					
Switching diagram			13 - Dahlander motor control switch 1-0-2		
N° of elements			4		
Mounting form			O - Rear mounting with black handle		
Contact characteristics					
Rated insulation voltage Ui			IEC/EN	V	690
			UL/CSA	V	600
Rated impulse withstand voltage Uimp				kV	6
Conventional free air thermal current Ith			IEC/EN	A	32
			UL/CSA	A	32
Rated operational voltage				V	440
Rated operational impulse voltage				kV	4
Maximum fuse size for short-circuit protection In (gG)			10kA	A	35
			15kA	A	35
			25kA	A	35
Rated short time current Icw			1s	kA	1000
Conductivity			10/5 mA/V		
Operational current Ie IEC/EN					
AC1/AC21A				A	32
AC15			110V	A	25
			220/230V	A	20
			380/400V	A	10
			660/690V	A	2
Rated operational power in AC					
Three-phase AC-3			220/230V	kW	7.5
			380/440V	kW	11
			500/690V	kW	11
Single-phase AC-3			110V	kW	1.8
			220/230V	kW	3.5
			380/440V	kW	5.5
Three-phase AC23A			220/230V	kW	8
			380/440V	kW	15
			500/690V	kW	15
Single-phase AC23A			110V	kW	2.2
			220/230V	kW	3.5
			380/440V	kW	6

Rated operational current in DC

DC21A

48V	A	32
60V	A	32
110V	A	5
220V	A	0.8
440V	A	0.25

DC23A (poles in series)

24V	A	32 (1)
48V	A	32 (2)
60V	A	32 (3)
110V	A	15 (3)
220V	A	12 (4)

DC13

24V	A	32
48V	A	25
60V	A	14
110V	A	3
220V	A	0.5
440V	A	0.15

Power dissipation

W 1.6

Mechanical features

Terminals screw

M4

Tightening torque for terminals max

Nm 1.2

Conductor size

AWG - Rigid cable

min	AWG	16
Max	AWG	8

AWG - Flexible cable

min	AWG	16
Max	AWG	10

Conductor size (IEC) - Flexible cable

min	mm ²	1.5
Max	mm ²	6

Conductor size (IEC) - Rigid cable

min	mm ²	1.5
Max	mm ²	10

Mechanical life

cycles 1X10⁶

UL technical data

Motor power for direct-on-line control

for three-phase motor

120V	HP	3
240V	HP	7.5
480V	HP	15
600V	HP	15

for single-phase motor

120V	HP	1.5
240V	HP	3

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature


min °C -40
max °C +70

Resistance & Protection

Frontal IP degree	IP65
Terminals IP degree	IP20

Dimensions

Wiring diagrams

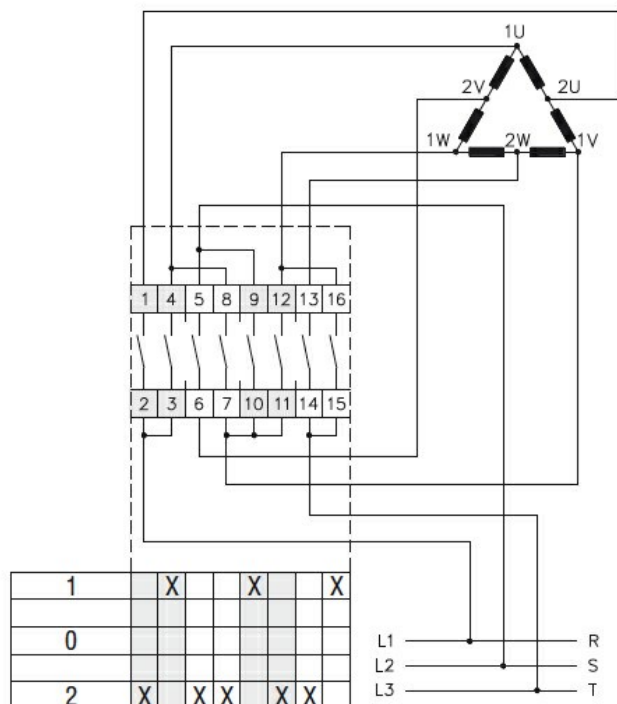

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

UL60947-4-1

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete